

MADRID - SHANGAI - HONG KONG - MÉXICO D.F.

The logo for ASMAIN features a stylized orange graphic above the company name. The graphic consists of three curved, flame-like shapes in orange, with a solid orange circle positioned below them.

ASMAIN

Su seguro aliado / Your reliable ally

A large, stylized orange graphic that serves as a background for the bottom section of the advertisement. It features three curved, flame-like shapes in orange, with a solid orange circle positioned below them.

**STRUCTURAL
AND CABIN DOORS
FOR SHIPS**

门和窗的开启方向定义

OPENING DIRECTION DEFINITION FOR DOOR AND WINDOW

1. 门开启方向的定义


门的开启方向，从室外向室内看，铰链在左边的为左开门，铰链在右边的为右开门，其开启方向如下图所示，代号见下表。

DEFINITION FOR DOOR OPEN DIRECTION

LOOKING FROM OUTSIDE, THE DOOR WITH HINGE ON THE LEFT(RIGHT) SIDE CALLED LEFT(RIGHT) OPENING DOOR.

THE OPENING DIRECTION INDICATED AS FIGURE, THE SYMBOL INDICATED AS LISTED.

门的开启方向	OPENING DIRECTION OF DOOR	特征代号 CODE
左内开	LEFT INWARD OPENING	5.0 (L1)
左外开	LEFT OUTWARD OPENING	6.1 (L0)
右内开	RIGHT INWARD OPENING	6.0 (R1)
右外开	RIGHT OUTWARD OPENING	5.1 (R0)

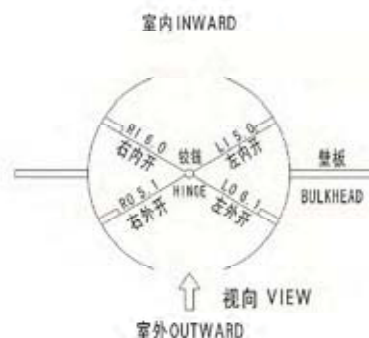

2. 窗开启方向的定义

THE DEFINITION FOR WINDOW OPENING DIRECTION.

2.1 从窗页开启面看，铰链在左侧为左开式(L)，铰链在右侧为右开式(R)。

VIEW FROM HINGE SIDE, HINGE ON LEFT SIDE CALLED LEFT TYPE, HINGE ON RIGHT SIDE CALLED RIGHT TYPE.



2.2 当视向正对屏蔽内窗页开启面，屏蔽窗页铰链在左侧为左内开式(A1)窗，屏蔽窗页铰链在右侧为右内开式(A2)窗，见下图。

FOR INWARD OPENING ELECTROMAGNETIC SHIELDING WINDOW, LOOKING FROM THE OPENING SIDE, THE HINGE ON THE LEFT SIDE CALLED LEFT TYPE, HINGE ON THE RIGHT SIDE CALLED RIGHT TYPE.

屏蔽内窗页右内开式窗(A2)
ELECTROMAGNETIC SHIELDING WINDOW
RIGHT INWARD OPENING WINDOW (A2)



玻璃窗页左外开式窗(B1)
LEFT OUT OPENING WINDOW (B1)

屏蔽内窗页左内开式窗(A1)
ELECTROMAGNETIC SHIELDING WINDOW
LEFT INWARD OPENING WINDOW (A1)



玻璃窗页右外开式窗(B2)
RIGHT OUT OPENING WINDOW (B2)

2.3 上铰链式(T)，玻璃窗铰链在上方的开启窗。



THE WINDOW WITH HINGE ON THE TOP OF FRAME CALLED TOP HINGED WINDOW

3. 移窗的定义

观察者站在室内向外窗看，当窗在关闭状态下转为开启时，外窗向左移动的为左式(L)移窗，外窗向右移动为右式(R)移窗。

OPENING DIRECTION DEFINITION FOR SLIDING WINDOW.

VIEW FROM INDOOR, OUTSIDE WINDOW LEAF OPENS TOWARD LEFT CALLED LEFT TYPE, OUTSIDE WINDOW LEAF OPENS TOWARD RIGHT CALLED RIGHT TYPE.

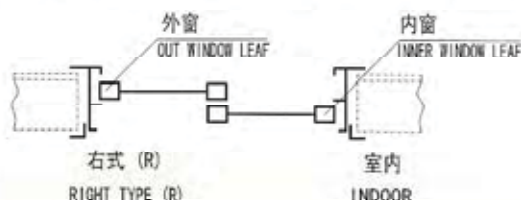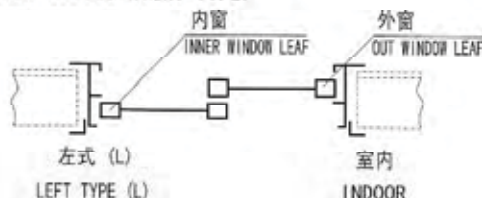

船用风雨密单扇钢质门

GB/T 3477-1996

MARINE WEATHERTIGHT SINGLE-LEAF STEEL DOOR

适用于船舶干舷甲板以上的上层建筑及甲板室出入口使用的门，满足 ISO 6042-1980

USED FOR DOORWAY OF SUPERSTRUCTURE ABOVE FREEBOARD DECK OR DECK HOUSE TO MEET ISO 6042-1980

1、门的分级及适用部位 CLASS OF DOOR AND USED FOR STATION


级别	CLASS	适用部位	USED FOR STATION
A		干舷甲板上的第一层上层建筑的前端壁 [由艏垂线向前 (0.1 ~ 0.7) L 范围]	
B		干舷甲板上的第二层上层建筑的前端壁 [由艏垂线向前 (0.1 ~ 0.7) L 范围] 和第一层上层建筑的后端壁及侧壁	
C		干舷甲板上的第三层上层建筑的前端壁 [由艏垂线向前 (0.2 ~ 0.6) L 范围] 和第二层上层建筑的后端壁及侧壁	
D		干舷甲板上的第四层上层建筑以上的舱壁和第三层上层建筑的后端壁及侧壁	

2、门的型式及规格 TYPE AND STANDARD OF DOOR

型式	TYPE	名称	NAME	适用部位				USED FOR STATION
AF		A 级方角门		1050 (1000X500)	1260 (1200X600)	1460 (1400X600)	1475 (1400X750)	
AY		A 级圆角门		1490 (1400X900)	1660 (1600X600)	1675 (1600X750)	1690 (1600X900)	
BF		B 级方角门		1050 (1000X500)	1260 (1200X600)	1460 (1400X600)	1475 (1400X750)	
BY		B 级圆角门		1490 (1400X900)	1660 (1600X600)	1675 (1600X750)	1690 (1600X900)	
CF		C 级方角门		1050 (1000X500)	1260 (1200X600)	1460 (1400X600)	1475 (1400X750)	
CY		C 级圆角门		1490 (1400X900)	1660 (1600X600)	1675 (1600X750)	1690 (1600X900)	
DF		D 级方角门		1050 (1000X500)	1260 (1200X600)	1460 (1400X600)	1475 (1400X750)	
				1490 (1400X900)	1660 (1600X600)	1675 (1600X750)	1690 (1600X900)	
DY		D 级圆角门		1860 (1800X600)	1875 (1800X750)	1890 (1800X900)		

3、门的节点型式 SECTION OF DOOR

门板厚 THICKNESS OF DOOR	挡板尺寸 SIZE OF SHELTER	门框高度 HEIGHT OF FRAME	门框材料 MATERIAL OF FRAME
T	h1xt1	h	
8	50X6	32	L100X63X10 割制
6	32X4	34	L100X63X8 割制
4		36	

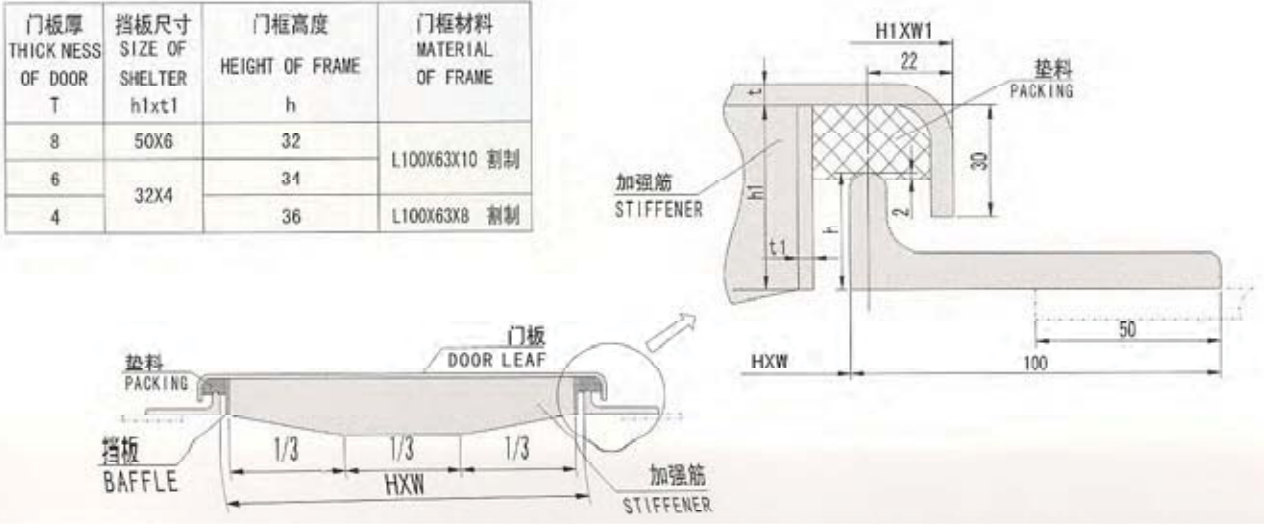


船用风雨密单扇钢质门

GB/T 3477-1996


MARINE WEATHERTIGHT SINGLE-LEAF STEEL DOOR

4、AF、AY 型钢质门 TYPE AF、AY STEEL DOOR

AF 型 TYPE AF

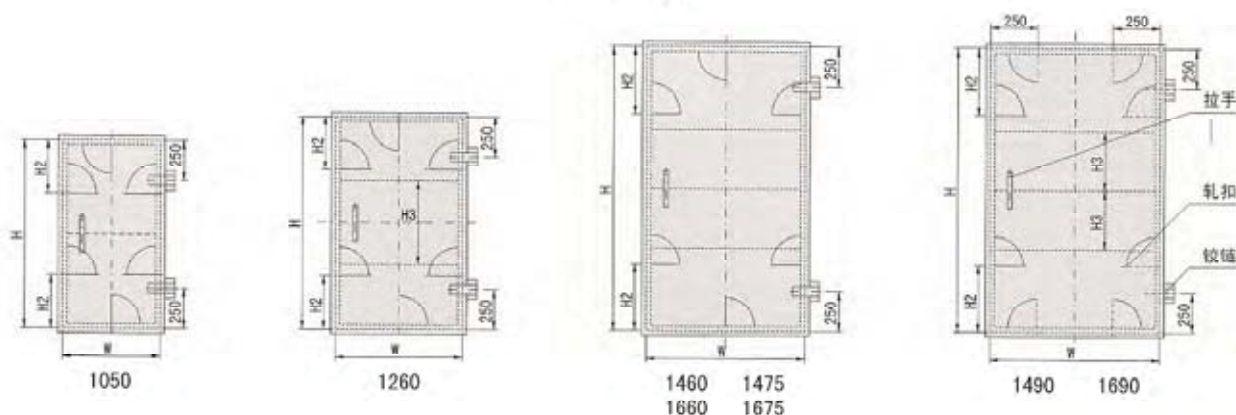

AY 型 TYPE AY

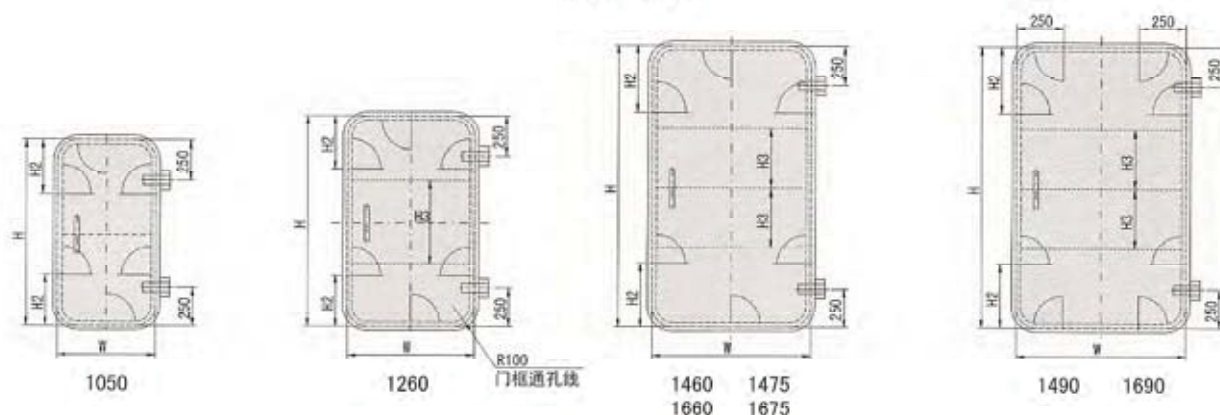

规格号 CODE	通孔尺寸 SIZE OF DOORWAY HXW	门板尺寸 SIZE OF DOOR LEAF H1XW1	围壁开孔尺寸 OPENING SIZE OF WALL			门板厚度 THICK OF DOOR LEAF		加强筋 STIFFENER							轧扣数量 NUMBER OF DOGS	H2
						≤ 80	>80	长 L, M								
			AF	AY	≤ 80	80-120	120-150	150-210	210-300	H3						
1050	1000X500	1055X555	1100X600	R80	1100X600	R150	6		75X6	—	—	—	—	—	6	350
1260	1200X600	1255X655	1300X700	R80	1300X700	R150	6		75X6	—	—	—	—	400	6	350
1460	1400X600	1455X655	1500X700	R80	1500X700	R150	6	8	—	65X9	65X9	75X9	75X9	300	6	350
1475	1400X750	1455X805	1500X850	R80	1500X850	R150	6	8	—	75X9	75X12	90X9	90X12	300	6	350
1490	1400X900	1455X955	1500X1000	R80	1500X1000	R150	—	8	—	90X9	90X12	100X12	100X12	300	8	350
1660	1600X600	1655X655	1700X700	R80	1700X700	R150	—	8	—	65X9	75X9	75X12	75X12	340	6	410
1675	1600X750	1655X805	1700X850	R80	1700X850	R150	—	8	—	75X12	90X9	90X12	90X12	340	6	410
1690	1600X900	1655X955	1700X1000	R80	1700X1000	R150	—	8	—	90X12	100X12	125X9	125X9	340	8	410


船用风雨密单扇钢质门

GB/T 3477-1996


MARINE WEATHERTIGHT SINGLE-LEAF STEEL DOOR

5、BF、BY、CF、CY 型钢质门 TYPE BF、BY、CF、CY STEEL DOOR

BF、CF 型 TYPE BF、CF

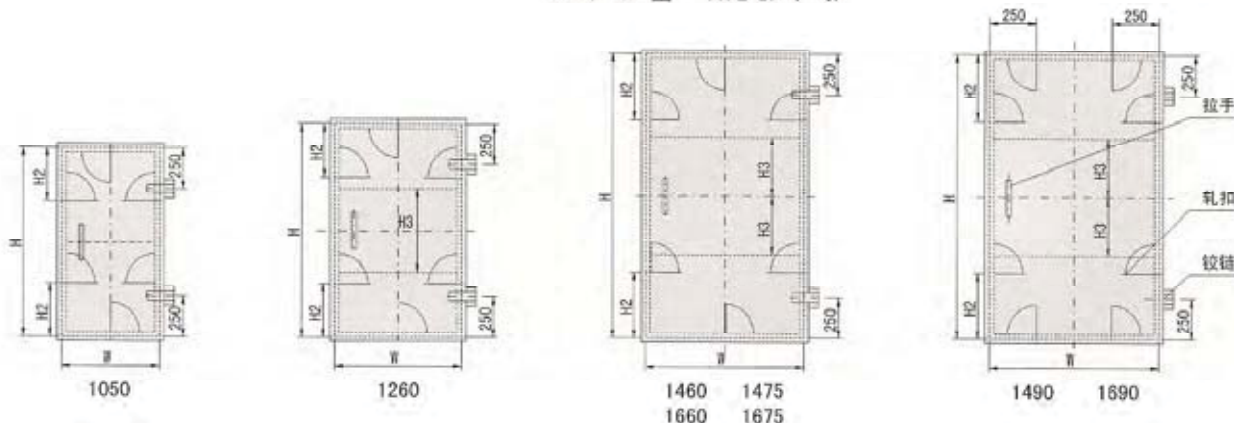

BY、CY 型 TYPE BY、CY

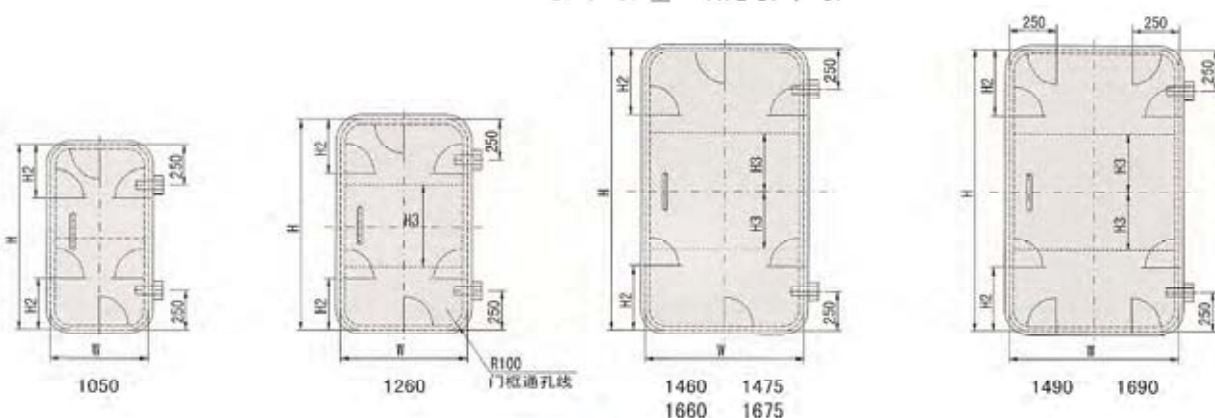

规格号 CODE	通孔尺寸 SIZE OF DOORWAY HXW	门板尺寸 SIZE OF DOOR LEAF H1XW1	围壁开孔尺寸 OPENING SIZE OF WALL AF、CFAY、CY			门板厚度 THICK OF DOOR LEAF		加强筋 STIFFENER										轧扣数量 NUMBER OF DOGS	H2
						B 级	C 级	B 级					C 级						
								船 长 L, M											
								< 80	> 80	< 80	> 80	< 80	80-150	150-210	210-300	< 80	80-140		
1050	1000X500	1055X555	1100X600 R80	1100X600 R150	6	—	4	—	50X5	—	—	—	50X5	—	—	—	6	350	
1260	1200X600	1255X655	1300X700 R80	1300X700 R150	6	—	4	—	50X5	—	—	—	50X5	—	—	400	6	350	
1460	1400X600	1455X655	1500X700 R80	1500X700 R150	6	8	4	6	50X5	65X6	65X6	65X9	50X5	65X6	65X6	470	6	350	
1475	1400X750	1455X805	1500X850 R80	1500X850 R150	6	8	4	6	50X5	65X9	75X9	75X9	50X5	65X6	65X6	470	6	350	
1490	1400X900	1455X955	1500X1000 R80	1500X1000 R150	—	8	—	6	—	75X9	75X12	75X12	—	65X6	65X9	470	8	350	
1660	1600X600	1655X655	1700X700 R80	1700X700 R150	—	8	—	6	—	65X6	65X9	65X9	—	65X6	65X6	540	6	410	
1675	1600X750	1655X805	1700X850 R80	1700X850 R150	—	8	—	6	—	65X9	75X9	75X12	—	65X6	65X6	540	6	410	
1690	1600X900	1655X955	1700X1000 R80	1700X1000 R150	—	8	—	6	—	75X9	75X12	90X12	—	65X6	65X9	540	8	410	

船用风雨密单扇钢质门


GB/T 3477-1996

MARINE WEATHERTIGHT SINGLE-LEAF STEEL DOOR

6. DF、DY 型钢质门 TYPE DF、DY STEEL DOOR

DF 型 TYPE DF

DY 型 TYPE DY


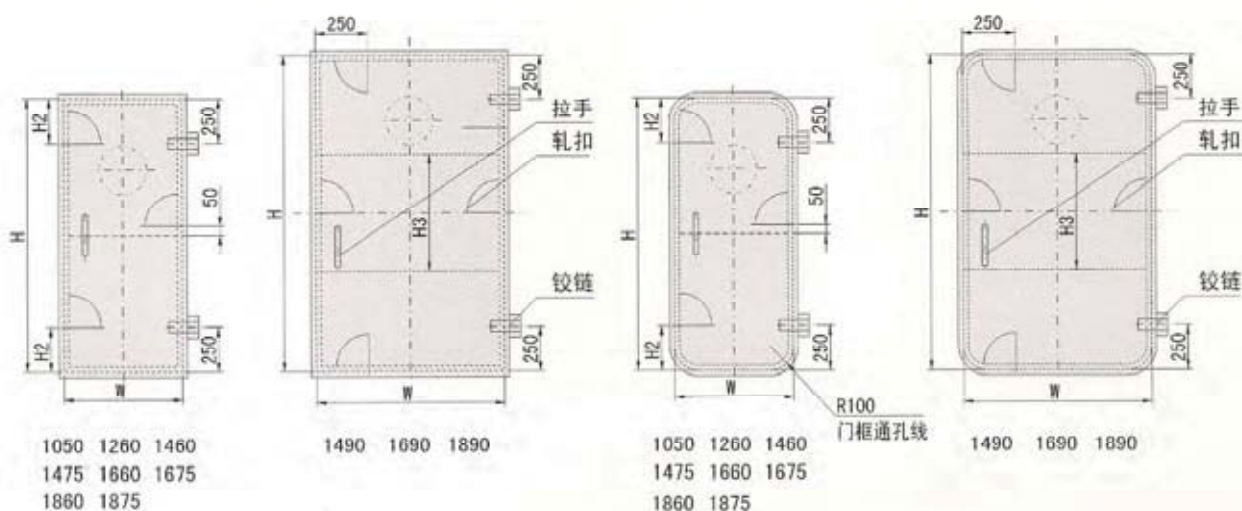


规格号 CODE	通孔尺寸 SIZE OF DOORWAY HxW	门板尺寸 SIZE OF DOOR LEAF H1XW1	围壁开孔尺寸 OPENING SIZE OF WALL		门板厚度 THICK OF DOOR LEAF	加强筋 STIFFENER		轧扣数量 NUMBER OF DOGS	H2
			DF	DY		宽 X 厚	H3		
1050	1000X500	1055X555	1100X600 R80	1100X600 R150	4	50X5	—	3	180
1260	1200X600	1255X655	1300X700 R80	1300X700 R150	4	50X5	—	3	180
1460	1400X600	1455X655	1500X700 R80	1500X700 R150	4	50X5	—	3	180
1475	1400X750	1455X805	1500X850 R80	1500X850 R150	4	50X5	—	3	180
1490	1400X900	1455X955	1500X1000 R80	1500X1000 R150	4	50X5	600	4	—
1660	1600X600	1655X655	1700X700 R80	1700X700 R150	6	65X6	—	3	180
1675	1600X750	1655X805	1700X850 R80	1700X850 R150	6	65X6	—	3	180
1690	1600X900	1655X955	1700X1000 R80	1700X1000 R150	6	65X6	600	4	—
1860	1800X600	1855X655	1900X700 R80	1900X700 R150	6	65X6	—	3	180
1875	1800X750	1855X805	1900X850 R80	1900X850 R150	6	65X6	—	3	180
1890	1800X900	1855X955	1900X1000 R80	1900X1000 R150	6	65X6	600	4	—

快开闭风雨密钢质门（普通）

262WHL003M-00

QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (COMMON)

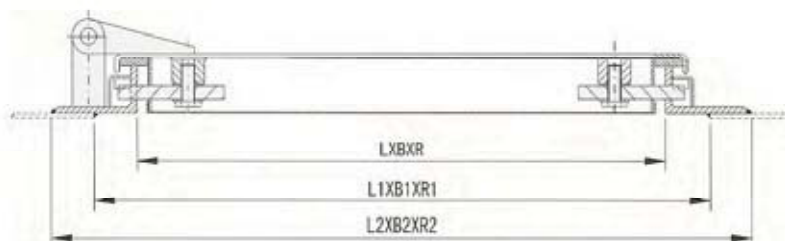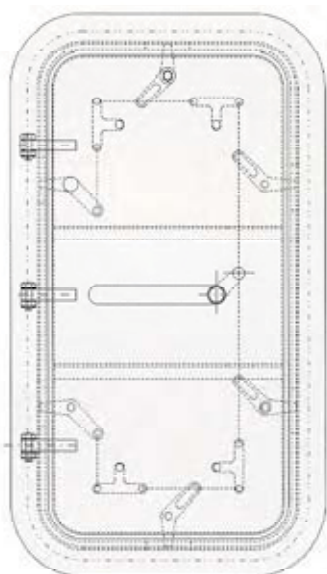




mm

规格 CODE	通孔尺寸 SIZE OF DOORWAY L × B × R	围壁开孔尺寸 SIZE OF B.H. OPENING L1 × B1 × R1	外形尺寸 SIZE OF OUTLINE L2 × B2 × R2	门板厚度 THICKNESS T	重量 WEIGHT kg
1050	1000 × 500 × R100	1100 × 600 × R150	1200 × 700 × R200	6	92
				8	104
1260	1200 × 600 × R100	1300 × 700 × R150	1400 × 800 × R200	6	113
				8	129
1460	1400 × 600 × R100	1500 × 700 × R150	1600 × 800 × R200	6	129
				8	147
1475	1400 × 750 × R100	1500 × 850 × R150	1600 × 950 × R200	6	144
				8	166
1490	1400 × 900 × R100	1500 × 1000 × R150	1600 × 1100 × R200	6	160
				8	185
1660	1600 × 600 × R100	1700 × 700 × R150	1800 × 800 × R200	6	137
				8	155
1675	1600 × 750 × R100	1700 × 850 × R150	1800 × 950 × R200	6	161
				8	186
1090	1000 × 900 × R100	1700 × 1000 × R150	1600 × 1100 × R200	6	178
				8	206

快开闭风雨密钢质门（埋入式）

262WHL002-00

QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (SUNK)

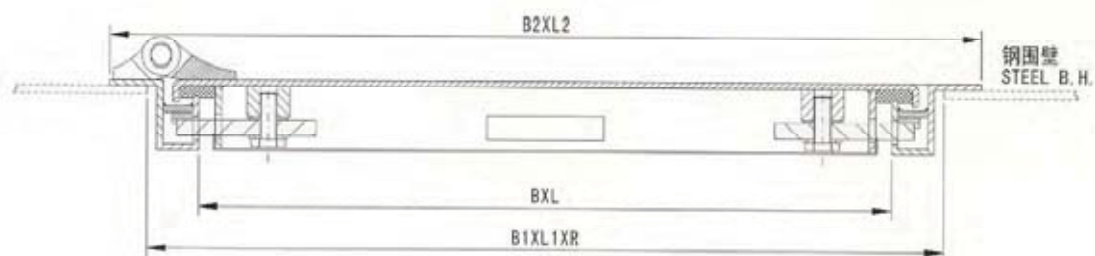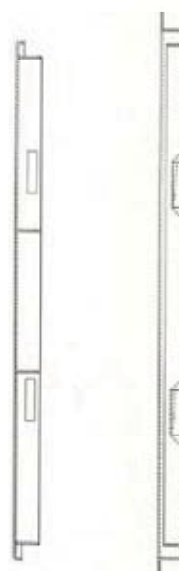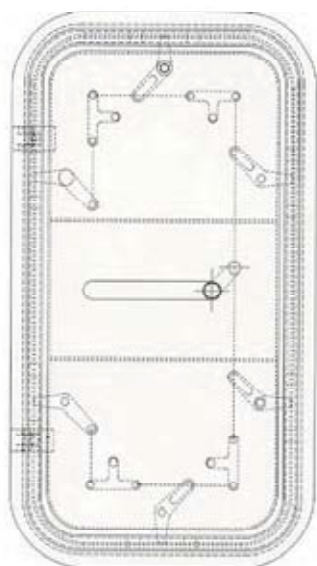



mm

通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF B. H. OPENING B1 × L1 × R	门框尺寸 FRAME SIZE B2 × L2	重量 kg WEIGHT	
			门板厚度 THICK. OF DOOR PLATE	
			6	8
600 × 1650	700 × 1750 × 150	800 × 1850	166	191
650 × 1650	750 × 1750 × 150	850 × 1850	177	205
700 × 1650	800 × 1750 × 150	900 × 1850	188	219

快开闭风雨密钢质门（圆盘式）

262WHL097-00

QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (DISCAL)

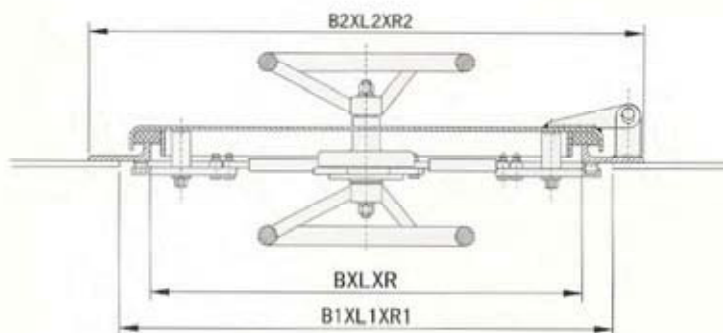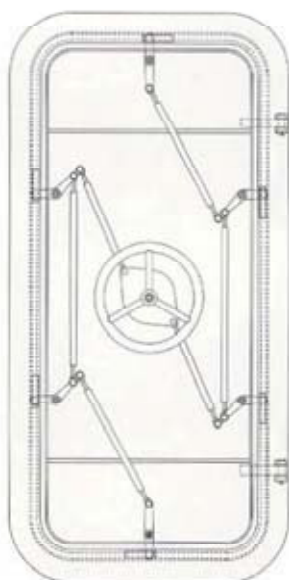


通孔尺寸 SIZE OF DOORWAY B × L × R	围壁开孔尺寸 SIZE OF B. H. OPENING B1 × L1 × R1	外形尺寸 SIZE OF OUTLINE B2 × L2 × R2	门板厚度 THICKNESS T		重量 WEIGHT kg	
600 × 1500 × 100	700 × 1600 × 150	800 × 1700 × 200	6	8	145	166
600 × 1600 × 100	700 × 1700 × 150	800 × 1800 × 200	6	8	154	176
700 × 1500 × 100	800 × 1600 × 150	900 × 1700 × 200	6	8	167	191
700 × 1600 × 100	800 × 1700 × 150	900 × 1800 × 200	6	8	174	199
700 × 1700 × 100	800 × 1800 × 150	900 × 1900 × 200	6	8	183	210
800 × 1500 × 100	900 × 1600 × 150	1000 × 1700 × 200	8		208	
800 × 1600 × 100	900 × 1700 × 150	1000 × 1800 × 200	8		223	
800 × 1700 × 100	900 × 1800 × 150	1000 × 1900 × 200	8		249	

船用风雨密单扇铝质门

CB/T454-1997

MARINE WEATHERTIGHT SINGLE-LEAF ALUMINIUM DOOR

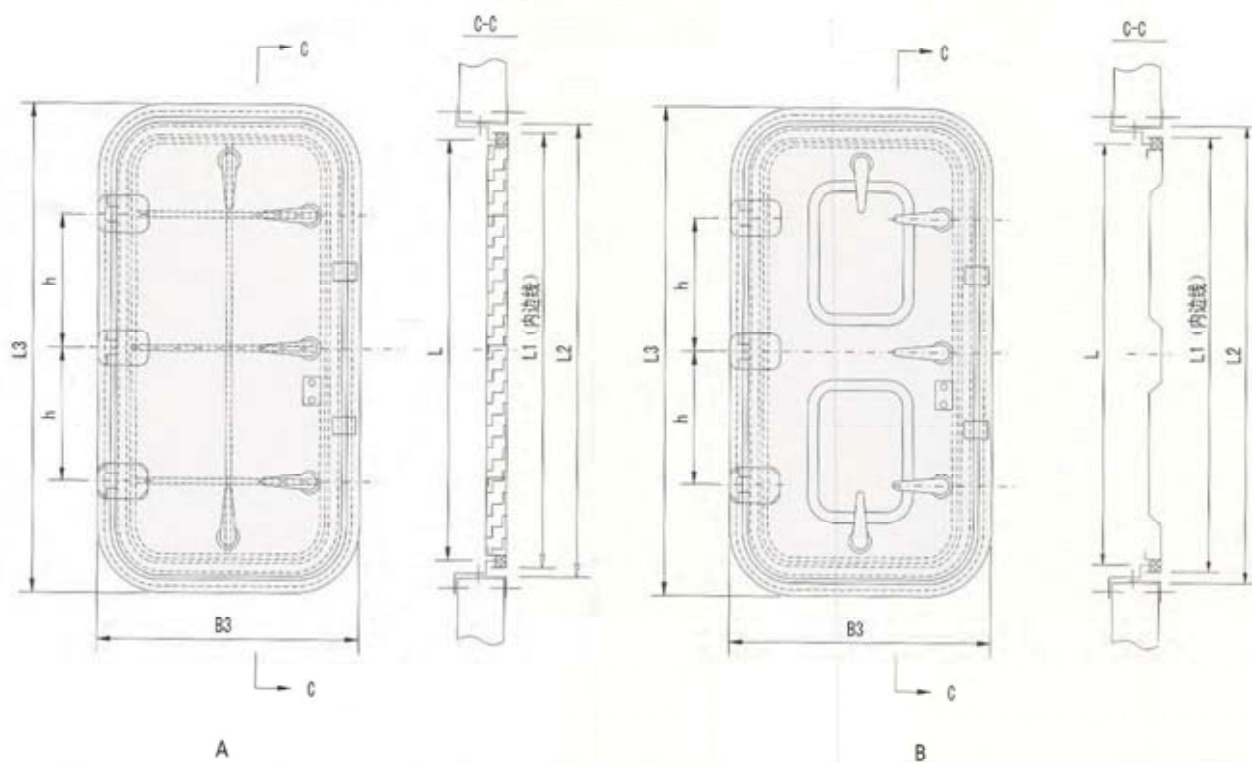

mm

类 型 TYPE	名 称 NAME	通 孔 尺 寸 SIZE OF DOORWAY B × L					
A	构架式船用风雨密单扇铝质门	500 × 1000	500 × 1200	500 × 1400	600 × 1200	600 × 1400	650 × 1600
B	模压式船用风雨密单扇铝质门	500 × 1000	500 × 1200	600 × 1200			



mm

通 孔 尺 寸 SIZE OF DOORWAY B × L × R	门板理论尺寸 (内边线) SIZE OF DOOR B1 × L1 × R1	围壁开孔尺寸 OPENING SIZE OF WALL B2 × L2 × R2	门框外形尺寸 SIZE OF FRAME B3 × L3 × R3	铰链把手位置尺寸 h	把手数量 OUT OF CLIP	重 量 kg WEIGHT	
						A	B
500 × 1000 × 100	540 × 1040 × 120	580 × 1080 × 140	654 × 1154 × 177	300	4	23	21
500 × 1200 × 100	540 × 1240 × 120	580 × 1280 × 140	654 × 1354 × 177	400	5	27	25
500 × 1400 × 100	540 × 1440 × 120	580 × 1480 × 140	654 × 1554 × 177	500	5	30	27
600 × 1200 × 100	640 × 1240 × 120	680 × 1280 × 140	754 × 1354 × 177	400	5	33	30
600 × 1400 × 100	640 × 1440 × 120	680 × 1480 × 140	754 × 1554 × 177	500	5	36	33
650 × 1600 × 100	690 × 1640 × 120	730 × 1680 × 140	804 × 1754 × 177	600	5	39.5	36

快开闭风雨密铝质门



QUICK OPEN & CLOSE WEATHERTIGHT ALUMINIUM DOOR

262WHL093D-00

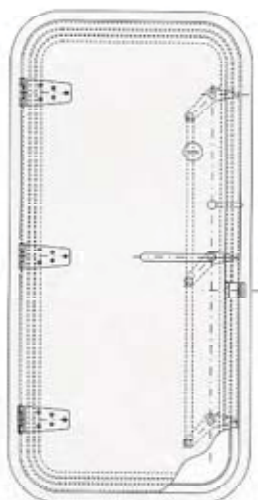

A 型—快开闭风雨密铝质门

TYPE A-QUICK OPEN & CLOSE WEATHERTIGHT ALUMINIUM DOOR

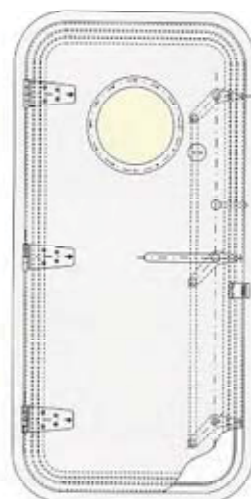

B 型—快开闭风雨密铝质门





TYPE B-QUICK OPEN & CLOSE WEATHERTIGHT ALUMINIUM DOOR

类 型 TYPE	通孔尺寸 SIZE OF DOORWAY B × L × R	围壁开孔尺寸 OPENING SIZE OF WALL B1 × L1 × R1	门板尺寸 SIZE OF DOOR B2 × L2 × R2	门板厚度 THICKNESS	mm
					重 量 kg WEIGHT
A	600 × 1200 × 100	680 × 1280 × 140	648 × 1248 × 124	4	32
	650 × 1400 × 100	730 × 1480 × 140	698 × 1448 × 124		35
	650 × 1600 × 100	730 × 1680 × 140	698 × 1648 × 124		38
	700 × 1600 × 100	780 × 1680 × 140	748 × 1648 × 124		39
B	600 × 1200 × 100	680 × 1280 × 140	648 × 1248 × 124		34
	650 × 1400 × 100	730 × 1480 × 140	698 × 1448 × 124		37
	650 × 1600 × 100	730 × 1680 × 140	698 × 1648 × 124		40
	700 × 1600 × 100	780 × 1680 × 140	748 × 1648 × 124		41

A60快开闭风雨密钢质门（单、双）

262WHL003FM-00

A60 QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (SINGLE, DOUBLE)

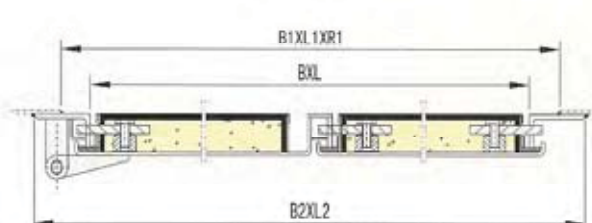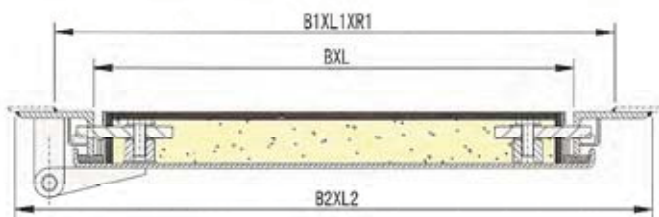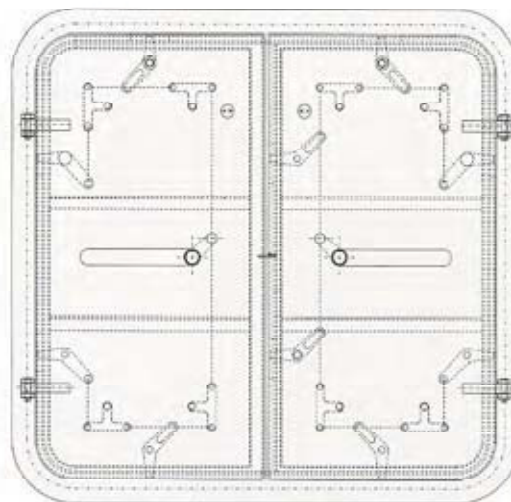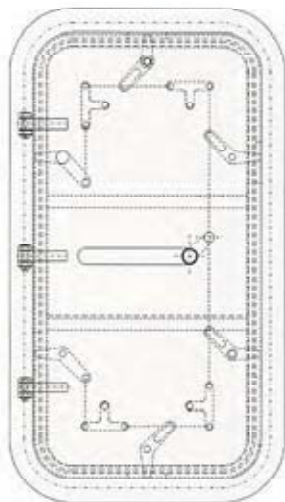

A 型— A60 快开闭风雨密钢质门（单）

TYPE A-A60 QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (SINGLE)

B 型— A60 快开闭风雨密钢质门（双）


TYPE B-A60 QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (DOUBLE)

类 型 TYPE	通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF B. H. OPENING B1 × L1 × R1	门框尺寸 FRAME SIZE B2 × L2	重量 kg WEIGHT	
				门板厚度 THICK. OF DOOR PLATE	
				6	8
A	600 × 1650	700 × 1750 × 150	800 × 1850	166	200
	650 × 1650	750 × 1750 × 150	850 × 1850	170	205
	700 × 1650	800 × 1750 × 150	900 × 1850	174	210
B	900 × 1650	1000 × 1750 × 150	1100 × 1850	249	300
	1000 × 1650	1100 × 1750 × 150	1200 × 1850	280	340
	1200 × 1650	1200 × 1750 × 150	1400 × 1850	298	357

A0快开闭风雨密钢质门（带窗）

262WHL040-00

A0 QUICK OPEN & CLOSE WEATHERTIGHT STEEL DOOR (WITH WINDOW)


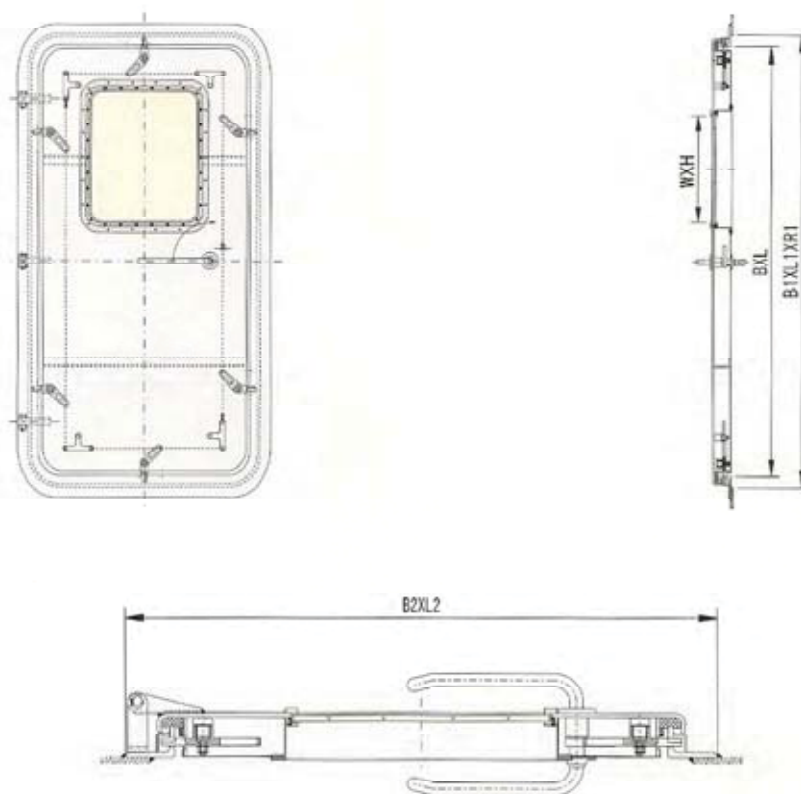


通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF B. H. OPENING B1 × L1 × R1	门框尺寸 FRAME SIZE B2 × L2	窗最大透光尺寸 MAXIMAL CLEAR SIZE OF WINDOW W × H	重量 kg WEIGHT	
				6	8
700 × 1600	800 × 1700 × 150	900 × 1800	200 × 400	150	184
700 × 1700	800 × 1800 × 150	900 × 1900	200 × 450	153	188
800 × 1600	900 × 1700 × 150	1000 × 1800	300 × 400	158	194
800 × 1700	900 × 1800 × 150	1000 × 1900	300 × 450	160	198
900 × 1700	1000 × 1800 × 150	1100 × 1900	400 × 450	167	208
900 × 1800	1000 × 1900 × 150	1100 × 2000	400 × 500	176	219
1000 × 2000	1100 × 2100 × 150	1200 × 2200	500 × 600	194	243

H120防火快开闭风雨密门

262WHL006FM-00

H120 FIREPROOF QUICK OPEN & CLOSE WEATHERTIGHT DOOR

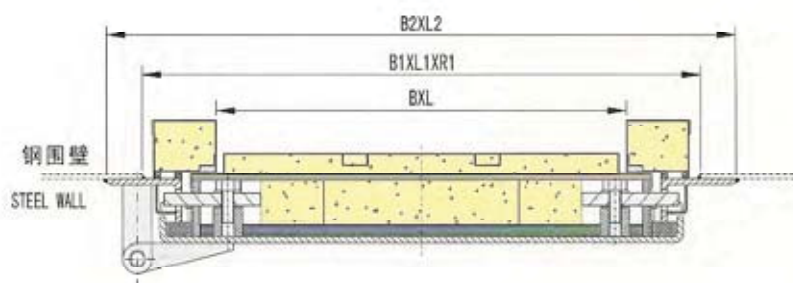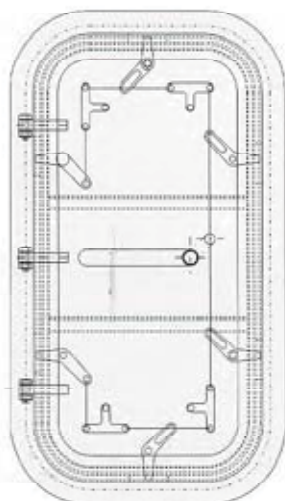



mm

通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF B. H. OPENING B1 × L1 × R1	外形尺寸 SIZE OF OUTLINE B2 × L2	门板厚度 THICKNESS T		重量 WEIGHT kg	
700 × 1500	900 × 1700 × 200	996 × 1796	6	8	207	235
700 × 1600	900 × 1800 × 200	996 × 1896	6	8	210	240
700 × 1700	900 × 1900 × 200	996 × 1996	6	8	214	245
800 × 1500	1000 × 1700 × 200	1096 × 1796	8		245	
800 × 1600	1000 × 1800 × 200	1096 × 1896	8		255	
800 × 1700	1000 × 1900 × 200	1096 × 1996	8		260	

A0、A60快开闭风雨密气密钢质门

262WHL003FM-00

A0、A60 QUICK OPEN & CLOSE WEATHERTIGHT AND GASTIGHT STEEL DOOR

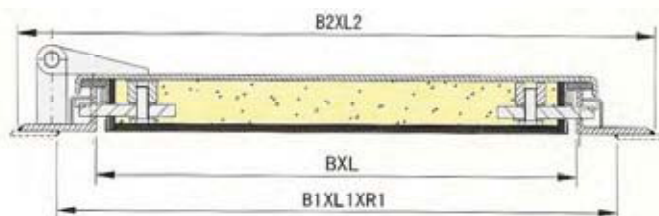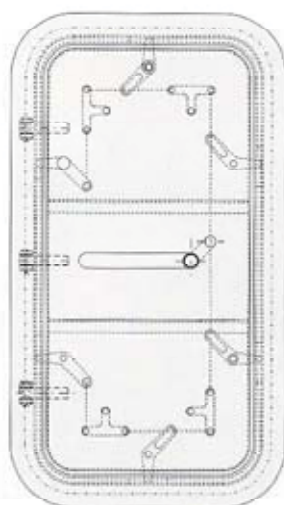

mm


通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF B. H. OPENING B1 × L1 × R1	外形尺寸 SIZE OF OUTLINE B2 × L2	重 量 WEIGHT kg			
			A0		A60	
			门板厚度 THICKNESS			
			6	8	6	8
600 × 1650	700 × 1750 × 150	800 × 1850	141	174	166	200
650 × 1650	750 × 1750 × 150	850 × 1850	144	179	170	205
700 × 1650	800 × 1750 × 150	900 × 1850	148	184	174	210

气密门


GASTIGHT DOOR

GB/T 3722-1995

适用于各类船舶闪点小于60° C 的油船、钻井平台、液化气船、化学品船和采油区拖轮等。
USED FOR SHIPS OF OIL TANKER THAT FLASH POINT < 60° C , DRILLING PLATFORM , CHEMICAL VESSEL , L.P.G AND N.P.G VESSEL AND OFFSHORE TUG ETC

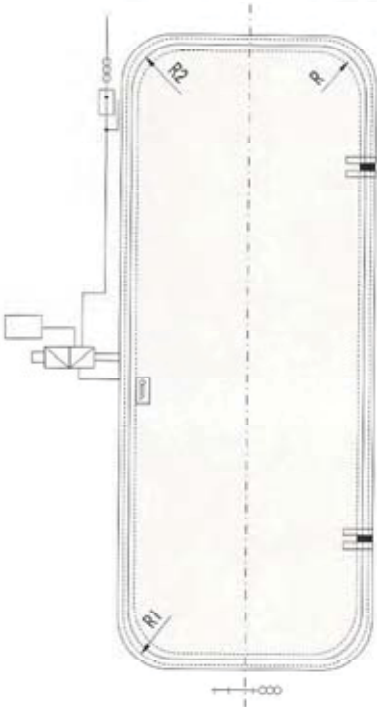

类 型 TYPE	名 称 NAME	开启方向 OPENING DIRECTION	门板材料 MATERIAL OF DOOR	气密性能 GASTIGHT PERFORMANCE (压力差维持值) Pa
A	侧开式 充气密封条密封气密门	左 开 L	不锈钢 N	500
B	滑移式 充气密封条密封气密门			100
C	滑移式 机械压夹密封气密门	右 开 R	铝合金 L	0

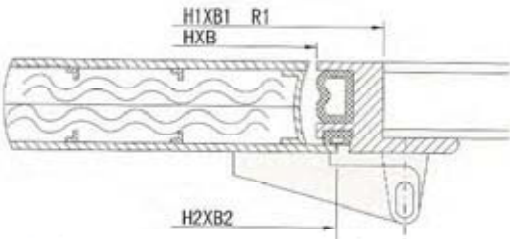

A 型
TYPE A


mm

通孔尺寸 SIZE OF DOORWAY H × B	围壁开孔尺寸 SIZE OF B.H. OPENING H1 × B1 R1	门页外形尺寸 SIZE OF DOOR H2 × B2	重 量 WEIGHT kg	
			不 锈 钢 N	铝 合 金 L
1600 × 600 R100	1605 × 605 R142	1630 × 630 R115	64	44
1650 × 650 R100	1735 × 735 R142	1680 × 680 R115	70	48
1700 × 700 R100	1785 × 785 R142	1730 × 730 R115	78	52
1750 × 700 R100	1835 × 785 R142	1780 × 730 R115	80	54
1700 × 750 R100	1785 × 835 R142	1730 × 780 R115	83	56
1750 × 750 R100	1835 × 835 R142	1780 × 780 R115	85	59
1800 × 750 R100	1885 × 835 R142	1830 × 780 R115	87	62
1800 × 800 R100	1885 × 885 R142	1830 × 830 R115	92	66

气密门

GASTIGHT DOOR

GB/T 3722-1995

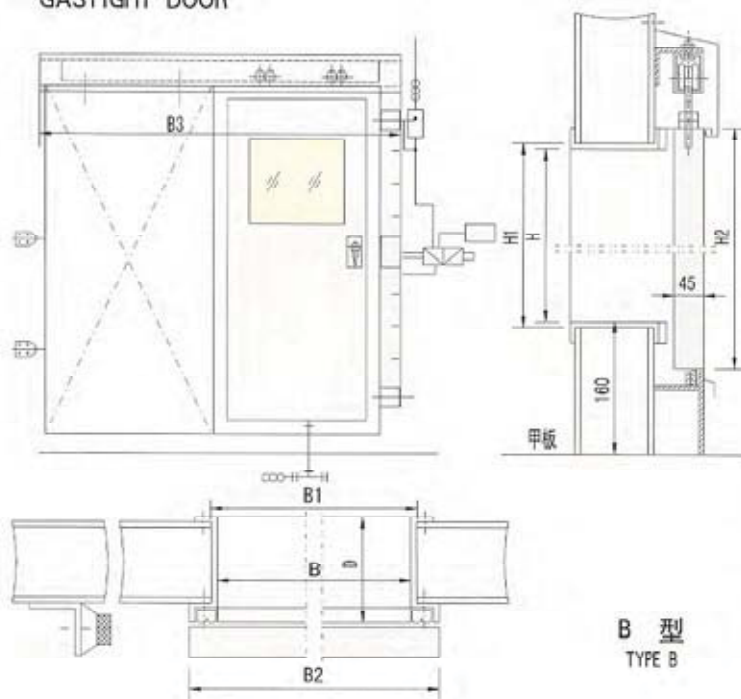

通孔尺寸 SIZE OF DOORWAY HXB	围壁开孔 尺寸 SIZE OF OPENING H1XB1	外形尺寸 SIZE OF DOOR H2XB2	滑轨长 SLIDE WAY B3	门框深 DEPTH OF FRAME D	重量 WEIGHT kg	
					不锈钢 N	铝合金 L
1700X750	1710X760	1850X900	1950	100	151	111
				150	163	117
				200	176	123
1700X900	1710X910	1850X1050	2100	100	164	119
				150	176	125
				200	189	131
1800X750	1810X760	1950X900	1950	100	155	114
				150	167	120
				200	180	126
1800X900	1810X910	1950X1050	2100	100	168	122
				150	180	128
				200	193	134
1800X1000	1810X1010	1950X1150	2200	100	177	128
				150	189	134
				200	202	140

B 型
TYPE B


标记示例

通孔尺寸为 1800X900mm，门框深为 150mm，B 型滑移式充气密封条密封，左开不锈钢气密门

气密门 BL 1800X900X150N

GB/T 3722-1995

通孔尺寸 SIZE OF DOORWAY HXB	围壁开孔 尺寸 SIZE OF OPENING H1XB1	外形尺寸 SIZE OF DOOR H2XB2	滑轨长 SLIDE WAY B3	门框深 DEPTH OF FRAME D	重量 WEIGHT kg	
					不锈钢 N	铝合金 L
1700X750	1785X835	1835X830	1950	100	153	113
				150	165	119
				200	178	125
1700X900	1785X905	1835X900	2100	100	166	121
				150	178	127
				200	191	133
1800X750	1885X835	1935X830	1950	100	157	116
				150	169	122
				200	182	128
1800X900	1885X905	1935X900	2100	100	170	124
				150	182	130
				200	195	136
1800X1000	1885X1005	1935X1000	2200	100	179	120
				150	191	136
				200	204	142

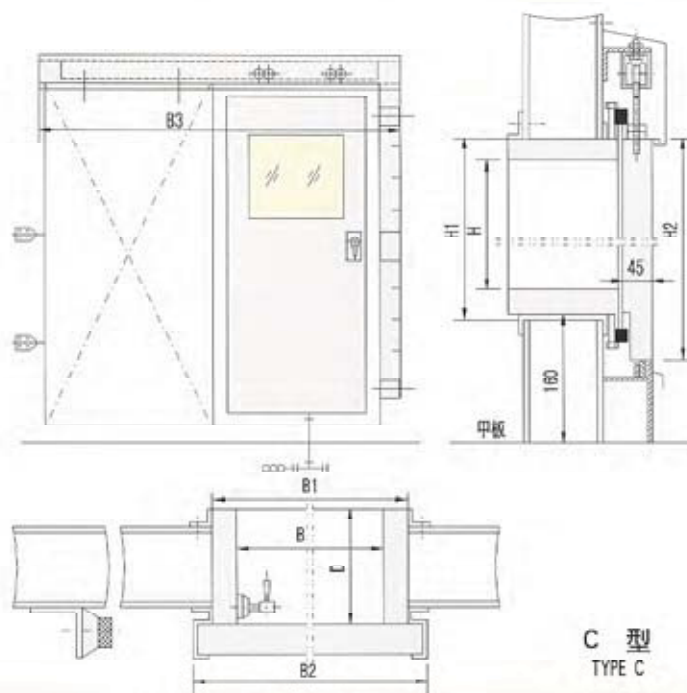



C 型
TYPE C

(舱室A型) A0、A60风雨密气密门 (单、双)

262WHL005M-00

(TYPE A FOR CABIN) A0、A60 WEATHERTIGHT AND GASTIGHT DOOR (SINGLE、DOUBLE)

单 SINGLE (S)

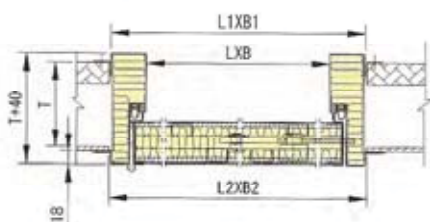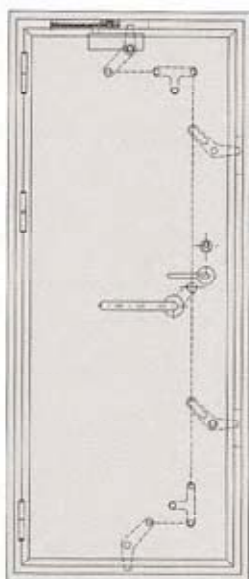



类 型 TYPE	通 孔 尺 寸 SIZE OF DOORWAY LXB	门 框 尺 寸 SIZE OF FRAME L1XB1	围 壁 开 孔 尺 寸 OPENING SIZE OF WALL L2XB2	重 量 kg WEIGHT	
				A0	A60
单 SINGLE (S)	1600X600	1700X700	1705X705	65	118
	1650X650	1750X750	1755X755	70	128
	1700X700	1800X800	1805X805	75	142
	1750X800	1850X900	1855X905	80	149

(舱室A型) A0、A60风雨密气密门 (单、双)

262WHL005M-00

(TYPE A FOR CABIN) A0、A60 WEATHERTIGHT AND GASTIGHT DOOR (SINGLE、DOUBLE)

双 DOUBLE (D)

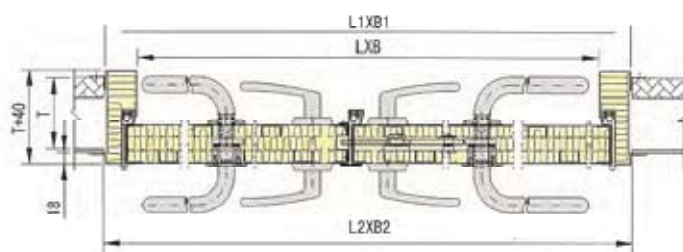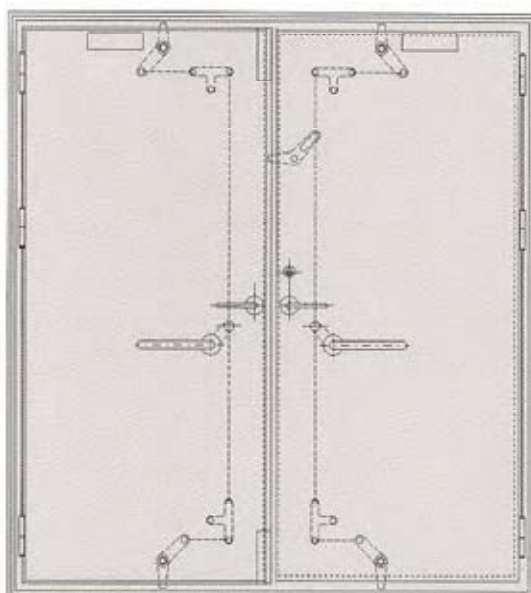


类 型 TYPE	通 孔 尺 寸 SIZE OF DOORWAY LXB	门 框 尺 寸 SIZE OF FRAME L1XB1	围 壁 开 孔 尺 寸 OPENING SIZE OF WALL L2XB2	重 量 kg WEIGHT	
				A0	A60
双 DOUBLE (D)	1600X1000	1700X1100	1705X1105	108	172
	1650X1100	1750X1200	1755X1205	115	184
	1700X1300	1800X1400	1805X1405	136	230
	1750X1600	1850X1700	1855X1705	156	280

(舱室B型) A0、A60风雨密气密隔音门 (单、双)

262WHL018-00

(TYPE B FOR CABIN) A0, A60 WEATHERTIGHT AND GASTIGHT, SOUND REDUCING DOOR (SINGLE, DOUBLE)

单 SINGLE (S)

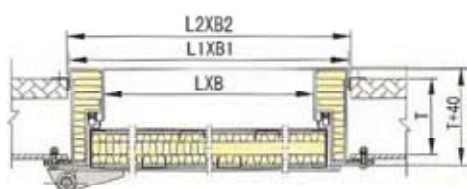



类 型 TYPE		通 孔 尺 寸 SIZE OF DOORWAY LXB	门 框 尺 寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 OPENING SIZE OF WALL L2XB2	重 量 kg WEIGHT	
					A0	A60
A 不带窗 WITHOUT WINDOW	单 SINGLE (S)	1600X600	1700X700	1705X705	65	115
		1650X650	1750X750	1755X755	70	125
1700X700		1800X800	1805X805	75	139	
B 带窗 WITH WINDOW		1750X800	1850X900	1855X905	80	146

(舱室B型) A0、A60风雨密气密隔音门 (单、双)

262WHL018-00

(TYPE B FOR CABIN) A0、A60 WEATHERTIGHT AND GASTIGHT, SOUND REDUCING DOOR (SINGLE, DOUBLE)

双 DOUBLE (D)

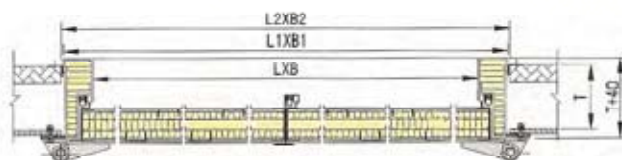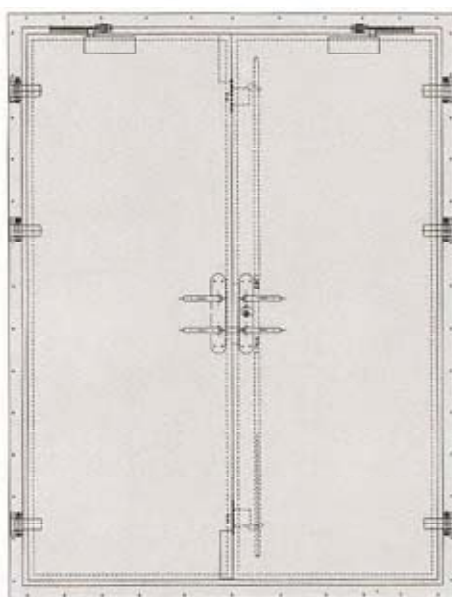


类 型 TYPE		通 孔 尺 寸 SIZE OF DOORWAY LXB	门 框 尺 寸 SIZE OF FRAME L1XB1	围 壁 开 孔 尺 寸 OPENING SIZE OF WALL L2XB2	重 量 kg WEIGHT	
					A0	A60
A 不 带 窗 WITHOUT WINDOW B 带 窗 WITH WINDOW	双 DOUBLE (D)	1600X1000	1700X1100	1705X1105	108	192
		1650X1100	1750X1200	1755X1205	115	212
		1700X1300	1800X1400	1805X1405	136	258
		1750X1600	1850X1700	1855X1705	156	280

(整体式) 驾驶室移门


(INTEGRAL) SLIDING DOOR FOR WHEELHOUSE

262WHL008A-00 (参照 CBM2055-82)

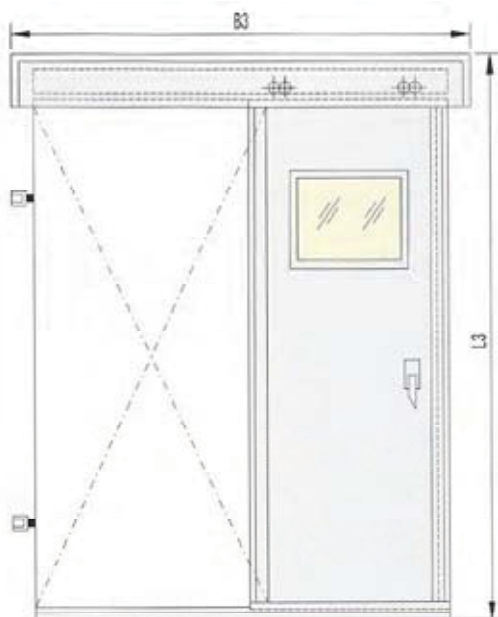

本产品按照 ISO 国际标准设计制造，具有噪音小、外形美观、开闭轻便等优点，适合各类船舶使用。

THIS PRODUCT TO BE MADE IN ACCORDANCE WITH STANDARD OF ISO . ITS ADVANTAGE IS LOW NOISE , BEAUTIFUL AND LIGHTY , USED FOR VARIOUS KIND OF SHIPS .

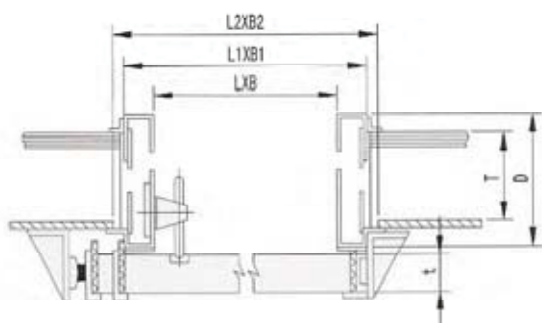

A	不锈钢	STAINLESS STEEL
B	铝质	ALUMINIUM
C	门页铝质其它钢质	ALUMINIUM DOOR BOARD OTHER STEEL

类 型 TYPE	通孔尺寸 SIZE OF DOORWAY L × B	门框尺寸 SIZE OF FRAME L1 × B1	围壁开口 SIZE OF OPENING L2 × B2	外形尺寸 SIZE OF DOOR L3 × B3	D	开 向 OPENING	重 量 kg WEIGHT		
							A	B	C
A	1700 × 750	1760 × 810	1765 × 815	2250 × 1860	T+60	左 L	56	42	40
	1700 × 900	1760 × 960	1765 × 965	2250 × 2160			62	48	46
B	1800 × 900	1760 × 960	1865 × 965	2350 × 2160		右 R	66	52	50
	1900 × 1000	1860 × 1060	1865 × 1065	2350 × 2360			72	58	56

不锈钢/铝质舱室移门（单、双）

262WHL035-00


STAINLESS STEEL/ALUMINIUM SLIDING DOOR FOR CABIN(SINGLE, DOUBLE)

适用于船舶上层建筑内部舱室门，表面阳极氧化或贴膜处理。

USED FOR THE CABIN INSIDE ACCOMMODATION, THE SURFACE OF DOOR IS ANODIZED TREATED OR PVC COVERED .

单扇（S）

SINGLE

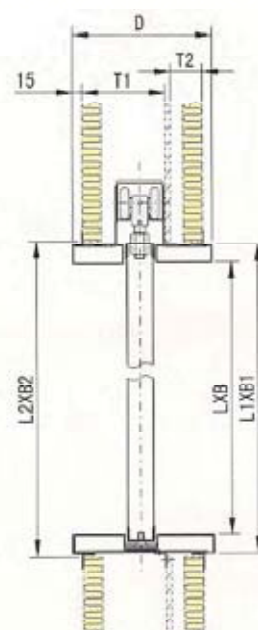

A : 基本型 BASEMODE

B: 带方窗 WITH FIXED LIGHT

C: 带风栅应急通孔
WITH VENTILATOR ESCAPE HOLE

D: 带方窗和风栅应急通孔
WITH FIXED LIGHT & VENTILATOR ESCAPE HOLE


N	不锈钢	STAINLESS STEEL
L	铝质	ALUMINIUM

类型 TYPE		通孔尺寸	门框尺寸	围壁开口	外形尺寸	框深 D ≥ 76	开 向 OPENING	重 量 WEIGHT kg							
		SIZE OF DOORWAY L × B	SIZE OF FRAME L1 × B1	SIZE OF OPENING L2 × B2	SIZE OF DOOR L3 × B3			铝 质 ALUMINIUM				不 锈 钢 STAINLESS STEEL			
								A	B	C	D	A	B	C	D
单 扇	A	1600 × 600	1660 × 660	1665 × 665	1700 × 1200	T1+T2+35	左 L	29	31	31	33	75	77	77	79
		1650 × 650	1710 × 710	1715 × 715	1810 × 1300			31	33	33	35	81	83	83	85
		1750 × 700	1810 × 760	1815 × 765	1190 × 1400			33	35	35	37	86	88	88	90
	B	1750 × 800	1810 × 860	1815 × 865	1910 × 1600			36	38	38	40	94	96	96	98
		1600 × 1200	1660 × 1320	1665 × 1325	1760 × 2400			57	61	61	65	148	152	152	150
		1650 × 1300	1710 × 1420	1715 × 1425	1810 × 2600			61	65	65	69	159	163	163	167
	C	1750 × 1400	1810 × 1520	1815 × 1525	1910 × 2800		右 R	65	69	69	73	169	173	173	177
		1750 × 1600	1810 × 1720	1815 × 1725	1910 × 3200			71	75	75	79	185	185	189	193
		D													

不锈钢/铝质舱室移门（单、双）

262WHL035-00

STAINLESS STEEL/ALUMINIUM SLIDING DOOR FOR CABIN (SINGLE, DOUBLE)



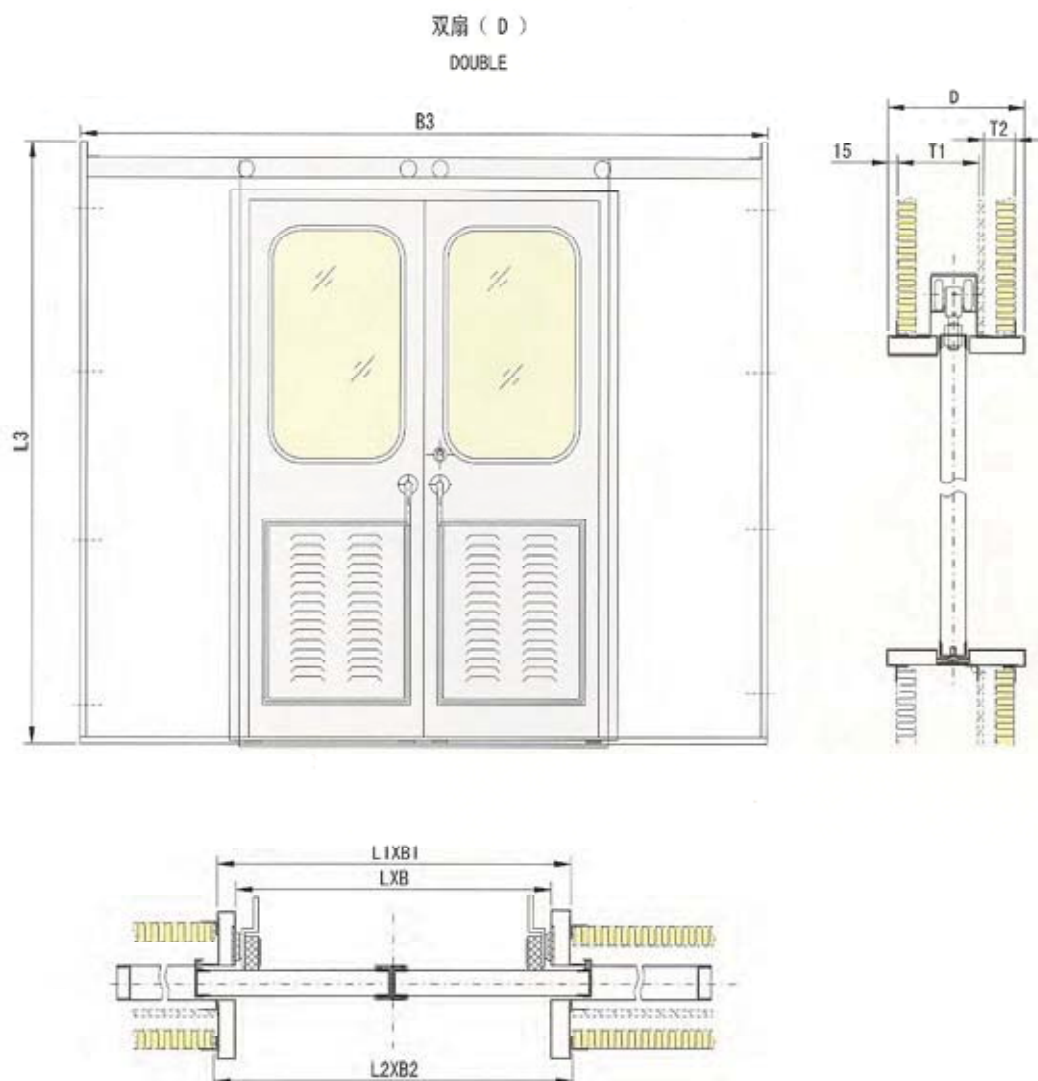


类 型 TYPE		通孔尺寸 SIZE OF DOORWAY L × B	门框尺寸 SIZE OF FRAME L1 × B1	围壁开口 SIZE OF OPENING L2 × B2	外形尺寸 SIZE OF DOOR L3 × B3	框深 D ≥ 76	重 量 WEIGHT kg							
							铝 质 ALUMINIUM				不 锈 钢 STAINLESS STEEL			
		A	B	C	D	A	B	C	D	A	B	C	D	
双 扇	A	1600 × 1200	1660 × 1320	1665 × 1325	1760 × 2360	T1+T2+35	63	71	71	79	163	171	171	179
	B	1650 × 1300	1710 × 1420	1715 × 1425	1810 × 2560		67	75	75	83	175	183	183	191
	C	1750 × 1400	1810 × 1520	1815 × 1525	1910 × 2760		72	80	80	88	186	194	194	202
	D	1750 × 1600	1810 × 1720	1815 × 1725	1910 × 3160		78	86	86	94	204	212	212	220

不锈钢/铝质驾驶室防风雨移门

262WHL056-00

STAINLESS STEEL/ALUMINIUM WEATHERTIGHT SLIDING DOOR FOR WHEELHOUSE

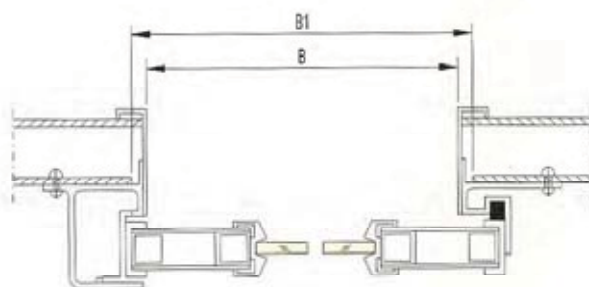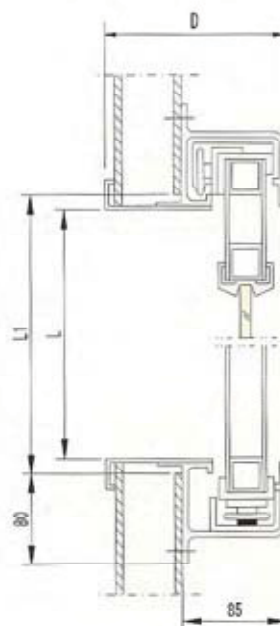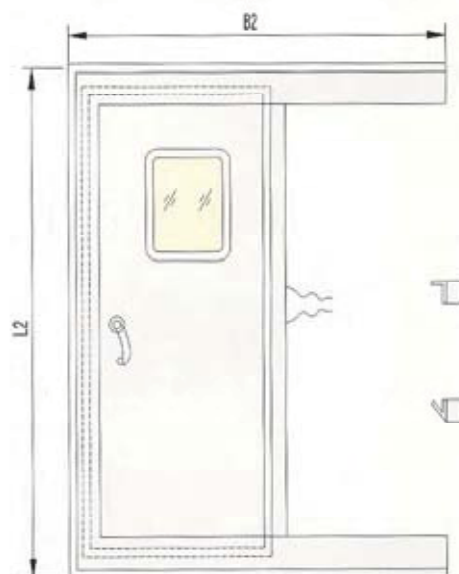

N	不锈钢	STAINLESS STEEL
L	铝质	ALUMINIUM

通孔尺寸 SIZE OF DOORWAY L × B	围壁开孔 SIZE OF OPENING L1 × B1	外形尺寸 SIZE OF DOOR L2 × B2	D	开 向 OPENING	重 量 WEIGHT kg	
					铝质 ALUMINIUM	不锈钢 STAINLESS STEEL
1700 × 750	1715 × 765	1875 × 1530	90-200	左 L	42.1	114
1700 × 900	1715 × 915	1875 × 1830			48.3	130
1800 × 900	1815 × 915	1975 × 1830		右 R	52.4	142
1800 × 1000	1815 × 1015	1975 × 2030			58.7	159


铝质/不锈钢风雨密外围壁门（单）

262WHL043A-00

ALUMINIUM /STAINLESS STEEL WEATHERTIGHT DOOR FOR WEATHER WALL (SINGLE)

适用于船舶上层建筑外门，具有良好风雨密性和气密性。

USED FOR SUPERSTRUCTURE OF SHIPS , IT HAS GOOD WEATHERTIGHTNESS AND GASTIGHTNESS .

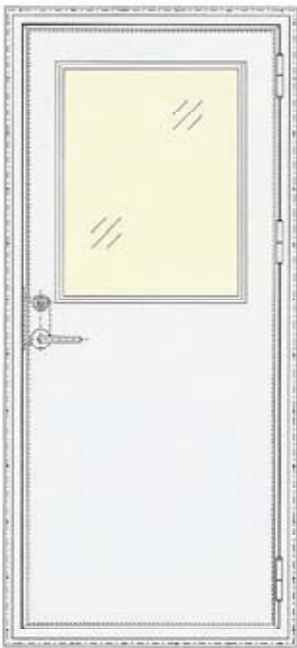



N	不锈钢	STAINLESS STEEL
L	铝质	ALUMINIUM

类 型 TYPE	通 孔 尺 寸 SIZE OF DOORWAY LXB	门 框 尺 寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 OPENING SIZE OF WALL L2XB2	框 深 DEPTH OF FRAME D > 80	开 向 OPENING	重 量 (kg) WEIGHT			
						铝质 ALUMINIUM		不锈钢 STAINLESS STEEL	
						A	B	A	B
A（带窗） WITH LIGHT	1600X600	1700X700	1705X705	T+45	右 外 R0	32	31	75	74
	1600X800	1700X900	1705X905			36	35	82	35
B（不带窗） WITHOUT LIGHT	1700X700	1800X800	1805X805		左 外 L0	35	34	78	34
	1800X800	1900X900	1905X905			38	37	85	37

铝质/不锈钢风雨密外围壁门（双）

262WHL043B-00

ALUMINIUM /STAINLESS STEEL WEATHERTIGHT DOOR FOR WEATHER WALL (DOUBLE)

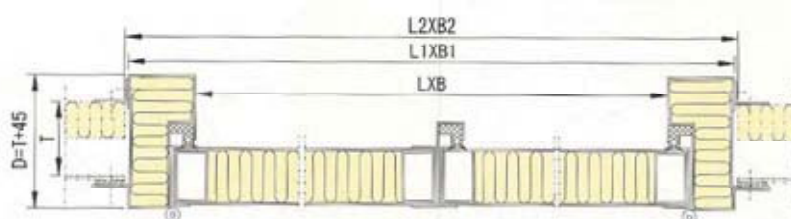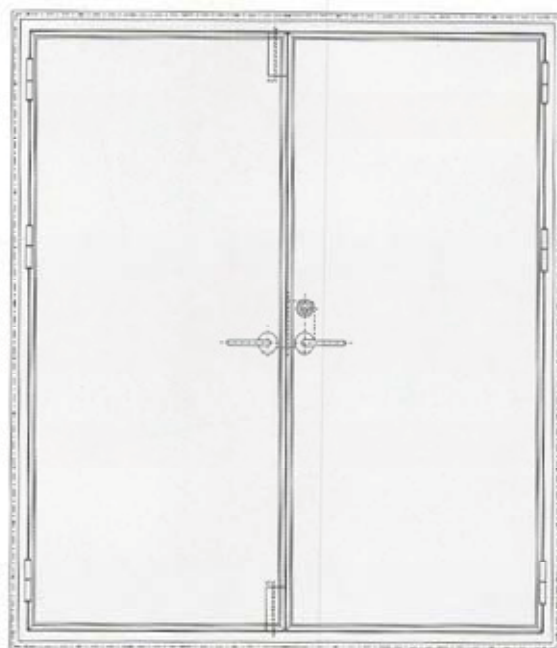


类 型 TYPE	通 孔 尺 寸 SIZE OF DOORWAY LXB	门 框 尺 寸 SIZE OF FRAME L1XB1	围 壁 开 孔 尺 寸 OPENING SIZE OF WALL L2XB2	框 深 DEPTH OF FRAME D > 80	重 量 (kg) WEIGHT			
					铝 质 ALUMINIUM		不 锈 钢 STAINLESS STEEL	
					A	B	A	B
A (带窗) WITH LIGHT	1600X1000	1700X1000	1705X1105	T+45	53	52	123	125
	1600X1200	1700X1300	1705X1305		61	60	142	144
B (不带窗) WITHOUT LIGHT	1700X1400	1800X1500	1805X1505		71	70	166	168
	1800X1600	1900X1700	1905X1705		81	80	190	192

铝质/不锈钢防风雨门

262WHL058-00

ALUMINIUM /STAINLESS STEEL WEATHERTIGHT DOOR

本产品采用铝合金型材 / 不锈钢制造。防风雨性能好。适用于上层建筑外门。
THIS PRODUCT IS MADE OF ALUMINIUM/STAINLESS STEEL ALLOY, GOOD WEATHER PROOF CAPACITY ,
USED FOR OUTSIDE DOOR OF SUPERSTRUCTURE 。

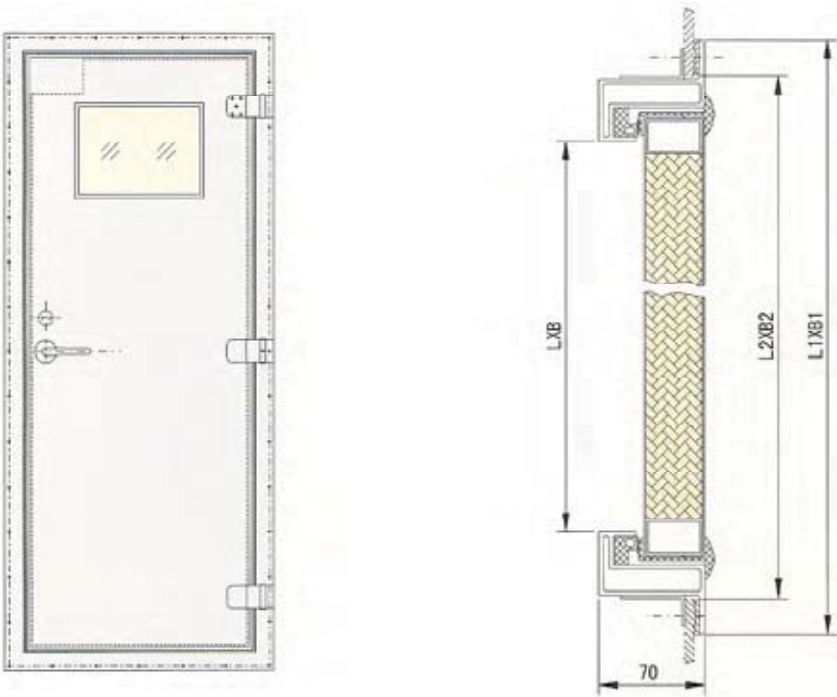



N	不锈钢	STAINLESS STEEL
L	铝质	ALUMINIUM

通孔尺寸 SIZE OF DOORWAY LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 OPENING SIZE OF WALL L2XB2	开向 OPENING	重量 (kg) WEIGHT	
				铝质 ALUMINIUM	不锈钢 STAINLESS STEEL
1650X600	1800X750	1736X686	右外 R0	31.8	85
1700X700	1850X850	1786X786	右内 R1	33.2	88
1750X750	1900X900	1836X836	左外 L0	34.4	91
1800X800	1950X950	1886X886	左内 L1	35.6	94

A0、A60整体式防火移门

262WHL008F-00

A0、A60 INTEGRAL FIRE-PROOF SLIDING DOOR

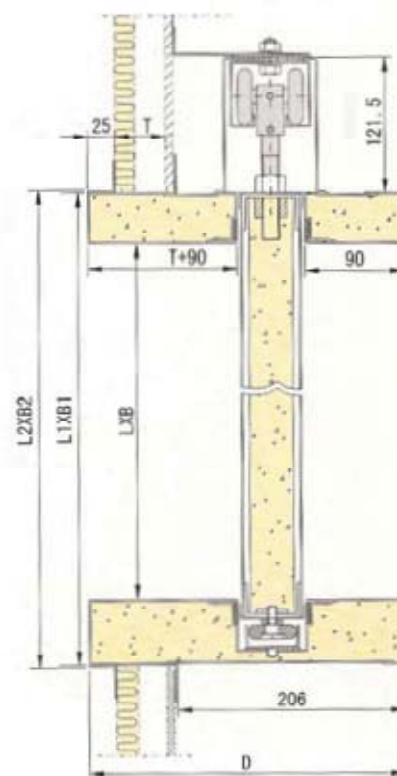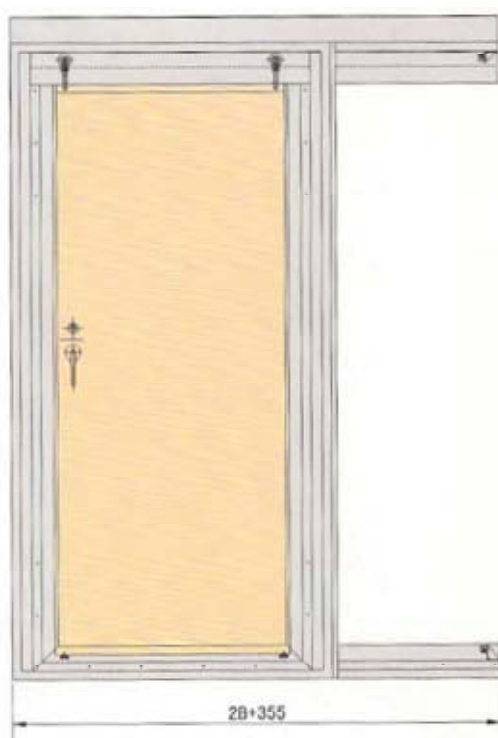


通孔尺寸 SIZE OF DOORWAY LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 OPENING SIZE OF WALL L2XB2	D	开向 OPENING	重量 (kg) WEIGHT	
					A0	A60
1700X700	1820X820	1825X825	T+241	右 R 左 L	80	150
1750X750	1870X870	1875X875			90	170
1800X800	1920X920	1925X925			100	187

H120防火移门

H120 FIRE-PROOF SLIDING DOOR

262WHL008F(120)-00

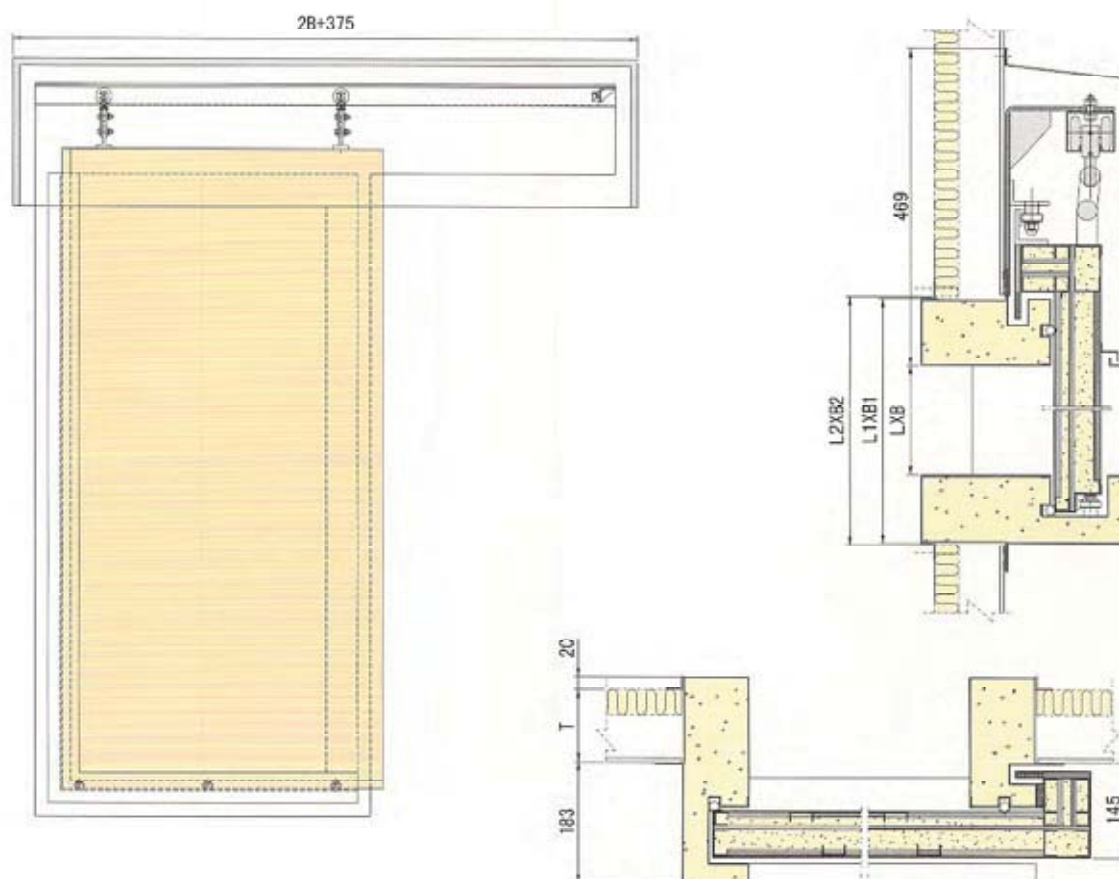


通孔尺寸 SIZE OF DOORWAY LXB	门框尺寸 SIZE OF FRAME L1XB1	围壁开孔尺寸 OPENING SIZE OF WALL L2XB2	D	开向 OPENING	重量 (kg) WEIGHT
1700X700	1900X900	1905X905	T+203	右 R	180
1750X750	1950X950	1955X955		左 L	204
1800X800	2000X1000	2005X1005			224

单扇防火门

SINGLE LEAF FIRE PROOF DOOR


CB*3234-84

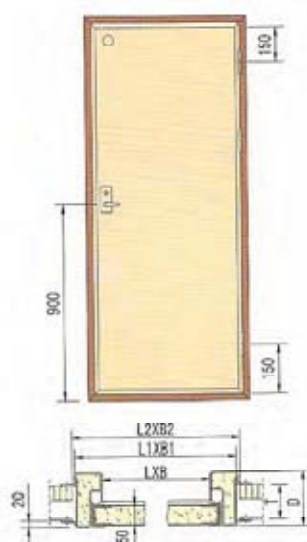

A60




A15 、 A30

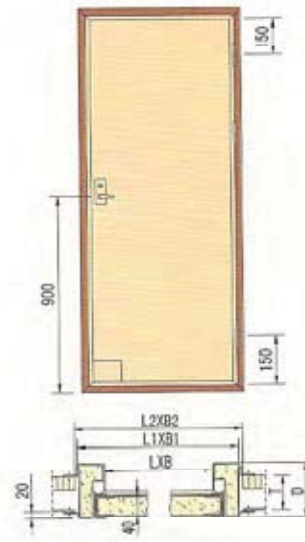


A0



B15

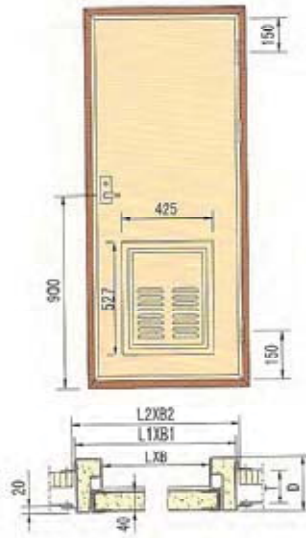

B15-S 带应急逃生风栅
B15-S WITH F-F VENT LOUVER

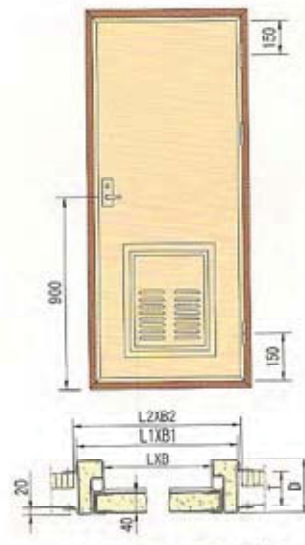

B0-S 带应急逃生风栅
B0-S WITH E-E VENT LOUVER

等级 CLASS	分 类 SUBDIVISION	开 向 OPENING DIR.
A 级 CLASS A	A60	左内 LI (ZN)
	A30	
	A15	左外 LO (ZW)
	A0	
B 级 CLASS B	B15	右内 RI (YN)
	B15-S	右外 RO (YW)
	B0-S	

适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

单扇防火门

SINGLE LEAF FIRE PROOF DOOR

CB*3234-84

等级 CLASS	通孔尺寸 DOORWAY SIZE LXB	门框尺寸 FRAME SIZE L1XB1	围壁开口 OPENING OF BH L2XB2	T	D	重 量 WEIGHT (Kg)			
						A0	A15	A30	A60
A	1650X600	1750X700	1755X705	由设计者定 DECIDED BY DESIGNER	1±40	61.75	88.08	106.53	112.26
	1650X650	1750X750	1755X755			64.51	92.87	111.71	117.83
	1650X700	1750X800	1755X805			67.02	97.4	116.99	123.52
	1650X750	1750X850	1755X855			69.7	102.1	122.17	129.09
	1650X800	1750X900	1755X905			72.29	106.72	127.35	134.68
	1700X600	1800X700	1805X705			63.29	90.41	109.33	115.21
	1700X650	1800X750	1805X755			66.02	95.21	114.71	121.01
	1700X700	1800X800	1805X805			66.77	100.06	120.03	126.74
	1700X750	1800X850	1805X855			71.41	104.77	125.31	132.44
	1750X750	1850X850	1855X855			73.2	107.51	128.44	135.76
	1750X800	1850X900	1855X905			76	112.46	133.87	141.61
	1800X600	1900X700	1905X705			66.53	95.2	114.96	121.17
	1800X650	1900X750	1905X755			69.29	100.15	120.46	127.14
	1800X700	1900X800	1905X805			72.16	105.23	126.06	133.14
	1800X750	1900X850	1905X855			75	110.27	131.58	139.1
	1800X800	1900X900	1905X905			77.87	115.35	137.56	145.5
	1850X600	1950X700	1955X705			68.05	97.48	117.7	124.08
	1850X650	1950X750	1955X755			70.97	102.66	123.38	130.2
	1850X700	1950X800	1955X805			73.89	107.84	129.06	136.32
	1850X750	1950X850	1955X855			76.81	113.03	135.14	142.84
	1850X800	1950X900	1955X905			79.62	118.1	140.5	148.65

等级 CLASS	通孔尺寸 DOORWAY SIZE LXB	门框尺寸 FRAME SIZE L1XB1	围壁开口 OPENING OF BH L2XB2	T	D	重 量 WEIGHT (Kg)	
						B0	B15
B	1650X600	1730X680	1735X685	由设计者定 DECIDED BY DESIGNER	1±40	55.88	95.01
	1650X650	1730X730	1735X735			58.64	100.1
	1650X700	1730X780	1735X785			61.15	104.93
	1650X750	1730X830	1735X835			63.83	109.94
	1650X800	1730X880	1735X885			66.42	114.85
	1700X600	1780X680	1785X685			57.24	97.46
	1700X650	1780X730	1785X735			59.97	102.56
	1700X700	1780X780	1785X785			62.72	107.71
	1700X750	1780X830	1785X835			65.36	112.72
	1700X800	1780X880	1785X885			68.11	117.77
	1750X600	1830X680	1835X685			58.67	99.95
	1750X650	1830X730	1835X735			61.47	105.19
	1750X700	1830X780	1835X785			64.18	110.35
	1750X750	1830X830	1835X835			66.98	115.49
	1750X800	1830X880	1835X885			69.78	120.74
	1800X600	1860X680	1865X685			60.13	102.51
	1800X650	1860X730	1865X735			62.89	107.75
	1800X700	1860X780	1865X785			65.76	113.03
	1800X750	1860X830	1865X830			68.6	118.37
	1800X800	1860X880	1865X885			71.47	123.95
	1850X600	1930X680	1935X685			61.47	104.9
	1850X650	1930X730	1935X735			64.39	110.28
	1850X700	1930X780	1935X785			67.31	115.76
	1850X750	1930X830	1935X835			70.23	121.45
	1850X800	1930X880	1935X885			73.04	126.82


带方窗防火门 (A30、A60)

FIREPROOF DOOR WITH SQUARE WINDOW (A30、A60)


262WHL016B-00 A30

262WHL005A-00 A60

A30

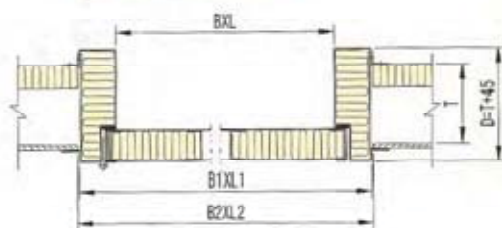



A60

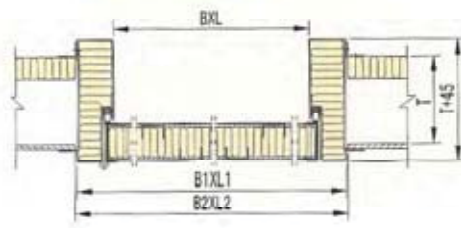

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B.H. OPENING B2 × L2	重量 kg WEIGHT	
			A30	A60
600 × 1650	700 × 1750	705 × 1755	109	114
650 × 1650	750 × 1750	755 × 1755	114	120
700 × 1650	800 × 1750	805 × 1755	119	126
600 × 1700	700 × 1800	705 × 1805	111	117
650 × 1700	750 × 1800	755 × 1805	117	123
700 × 1700	800 × 1800	805 × 1805	122	129
700 × 1750	800 × 1850	805 × 1855	125	132

注：重量为 D=100mm 时计算结果。 THE WEIGHT IS CALCULATED AT D=100mm.

适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

带消防小门防火门 (A0、A30、A60)

FIREPROOF DOOR WITH SMALL FIRE FIGHTING DOOR (A0、A30、A60)


262WHL016-00 A0


262WHL004A-00 A30

262WHL005-00 A60



适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

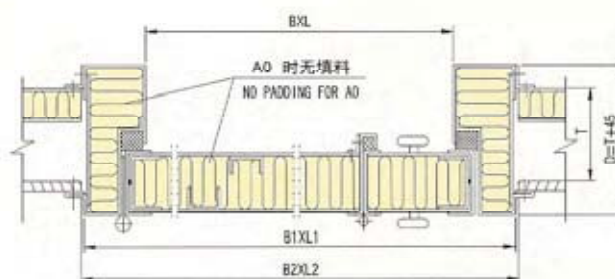

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B. H. OPENING B2 × L2	重量 WEIGHT kg		
			A0	A30	A60
600 × 1650	700 × 1750	705 × 1755	63	108	113
650 × 1650	750 × 1750	755 × 1755	65	113	118
700 × 1650	800 × 1750	805 × 1755	67	118	124
600 × 1700	700 × 1800	705 × 1805	65	111	116
650 × 1700	750 × 1800	755 × 1805	67	116	122
700 × 1700	800 × 1800	805 × 1805	69	121	128
700 × 1750	800 × 1850	805 × 1855	70	124	131

mm


注：重量为 D=100mm 时计算结果。

THE WEIGHT IS CALCULATED AT D=100mm.

A60级双扇防火门（带消防小门）


262WHL005S-00

A60 CLASS DOUBLE LEAVES FIREPROOF DOOR (WITH SMALL FIRE FIGHTING DOOR)

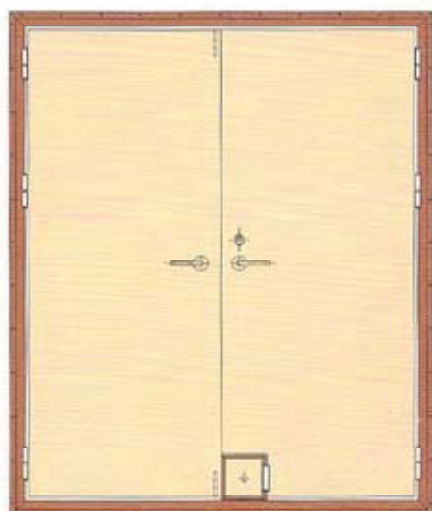

适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

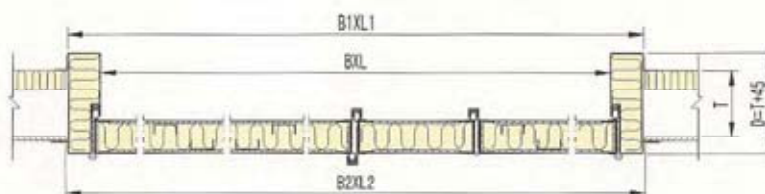

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B. H. OPENING B2 × L2	重量 WEIGHT kg
1100 × 1700	1194 × 1794	1200 × 1800	196
1200 × 1700	1294 × 1794	1300 × 1800	207
1300 × 1700	1394 × 1794	1400 × 1800	218
1400 × 1700	1494 × 1794	1500 × 1800	228
1100 × 1750	1194 × 1844	1200 × 1850	201
1200 × 1750	1294 × 1844	1300 × 1850	212
1300 × 1750	1394 × 1844	1400 × 1850	223
1400 × 1750	1494 × 1844	1500 × 1850	234

H30b铝质防火门


H30b ALUMINIUM FIREPROOF DOOR

262WHL004B-00ST



适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

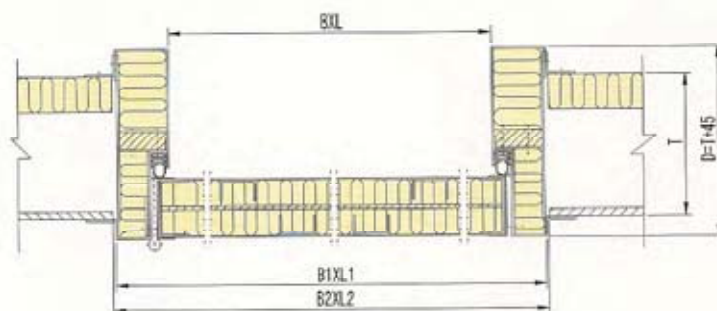

mm

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B. H. OPENING B2 × L2	重量 WEIGHT kg
600 × 1650	700 × 1750	705 × 1755	46
650 × 1650	750 × 1750	755 × 1755	48
700 × 1650	800 × 1750	805 × 1755	50
600 × 1700	700 × 1800	705 × 1805	47
650 × 1700	750 × 1800	755 × 1805	49
700 × 1700	800 × 1800	805 × 1805	51
700 × 1750	800 × 1850	805 × 1855	53



注：重量为 D=100mm 时计算结果。

THE WEIGHT IS CALCULATED AT D=100mm.

A0、A30 防火防盗门

A0、A30 FIRE PROOF ANTI-THEFT DOOR

262WHL004FD-00

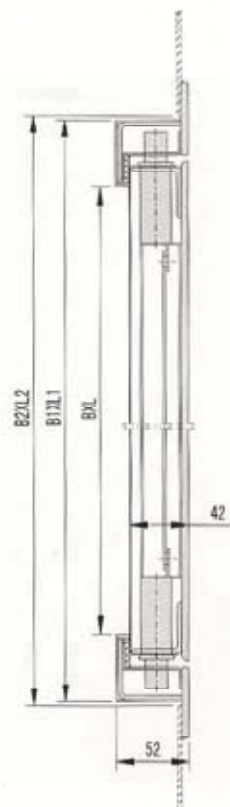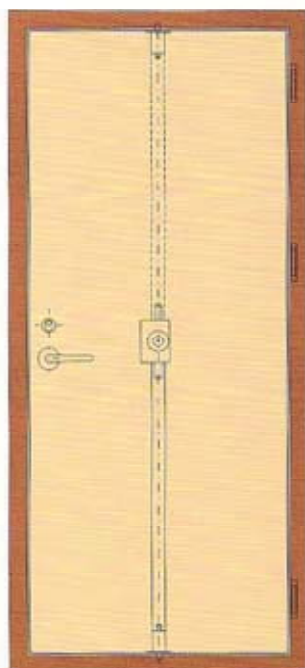


通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B.H. OPENING B2 × L2	重量 WEIGHT kg	
			A0	A30
600 × 1650	700 × 1750	705 × 1755	74	80
650 × 1650	750 × 1750	755 × 1755	79	84
700 × 1650	800 × 1750	805 × 1755	84	88
600 × 1700	700 × 1800	705 × 1805	77	83
650 × 1700	750 × 1800	755 × 1805	80	86
700 × 1700	800 × 1800	805 × 1805	83	89
700 × 1750	800 × 1850	805 × 1855	87	91

钢质隔音阻气门

CB*3217-84

STEEL SOUNDPROOF GAS-RETARDING DOOR

适用于机舱控制室等部位。
USED FOR ENGINE CONTROL ROOM .

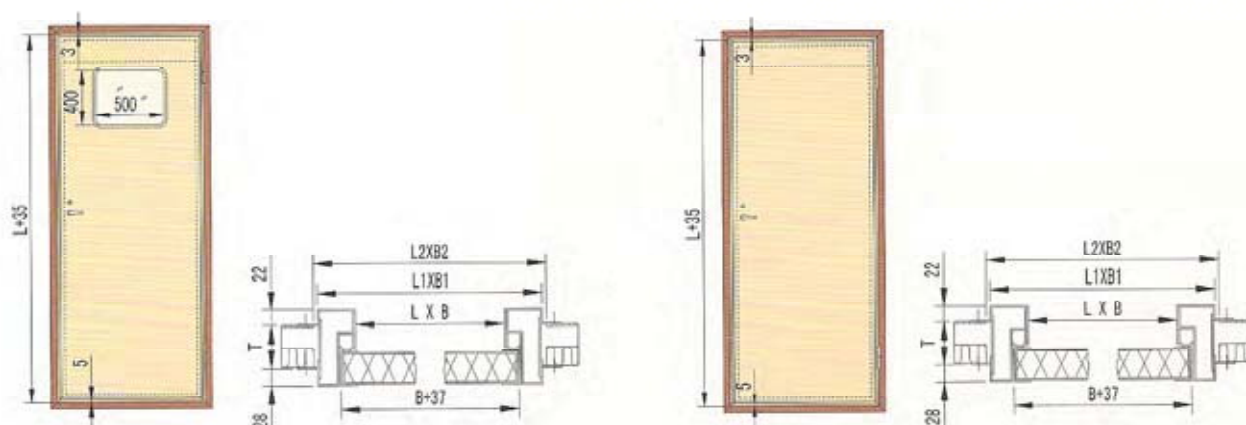

类 型 TYPE	通孔尺寸 SIZE OF DOORWAY L × B	门框尺寸 SIZE OF FRAME L1 × B1	围壁开孔尺寸 OPENING SIZE OF WALL L2 × B2	D ≥ 80	开 向 OPENING	重 量 WEIGHT Kg
A AZ	1650 × 600	1743 × 693	1750 × 700	T+50	左外 LO	68
	1750 × 700	1843 × 793	1850 × 800			73
	1650 × 800	1743 × 893	1750 × 900			73
B BZ	1650 × 600	1743 × 693	1750 × 700		右外 RO	81.5
	1750 × 700	1843 × 793	1850 × 800			86.5
	1650 × 800	1743 × 893	1750 × 900			89.9
C CZ	1650 × 600	1743 × 693	1750 × 700		左内 LI	81.5
	1750 × 700	1843 × 793	1850 × 800			86.5
	1650 × 800	1743 × 893	1750 × 900			85

A	不带窗	WITHOUT LIGHT	单层壁	USED FOR SINGLE WALL
AZ	带双层窗	WITH DOUBLE LIGHT		
B	不带窗	WITHOUT LIGHT	双层壁	USED FOR DOUBLE WALLS
BZ	带双层窗	WITH DOUBLE LIGHT		
C	不带窗	WITHOUT LIGHT	三层壁	USED FOR THREE WALLS
CZ	带双层窗	WITH DOUBLE LIGHT		


铝质舱室空腹门

CB/T3281-1997

ALUMINIUM HOLLOW CABIN DOOR

适用于各类船舶、舰艇室，表面阳极氧化静电喷塑和复塑处理。

USED FOR CABIN OF VARIOUS KINDS OF SHIP AND WAR SHIPS ,
THE DOOR SURFACE WILL BE ANODIZED BAKING FINISHED OR PVC COVERED .

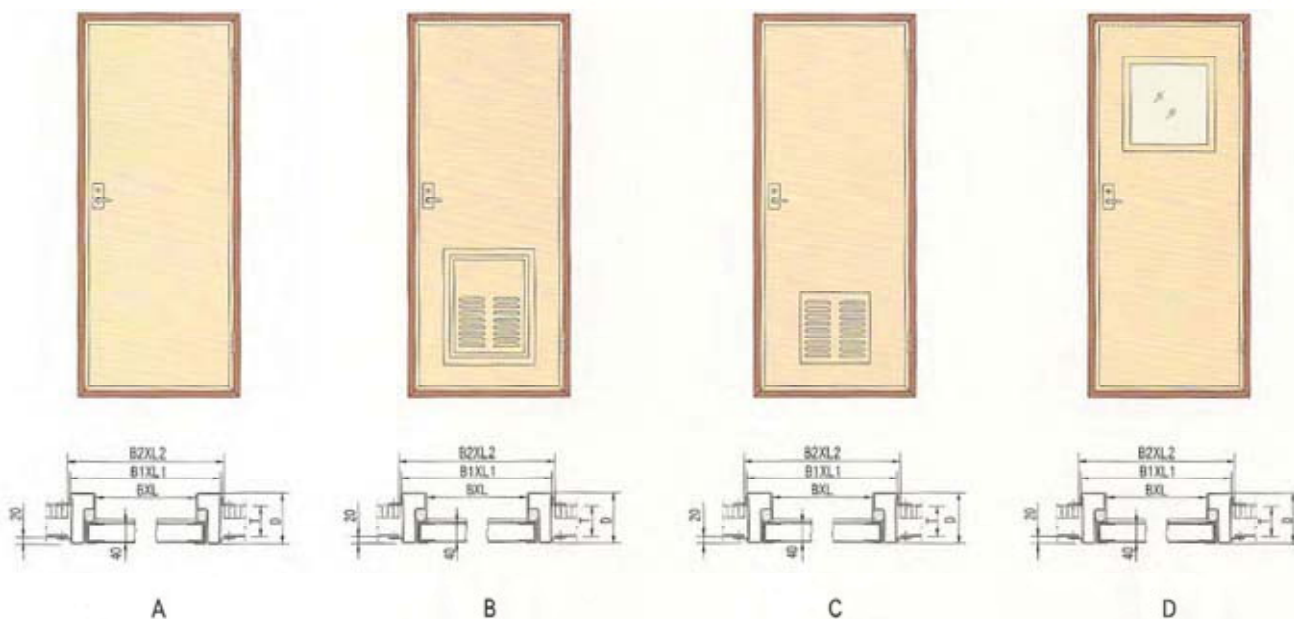



等级 CLASS	开 向 OPENING	通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 SIZE OF FRAME B1 × L1	开孔尺寸 OPENING SIZE B2 × L2	D (≥ 75)	重 量 WEIGHT Kg
A	左内 LI	600 × 1600	680 × 1680	686 × 1686	T+45	23.6
		650 × 1650	730 × 1730	736 × 1736		24.97
		700 × 1750	780 × 1830	786 × 1836		26.83
		800 × 1750	880 × 1830	886 × 1836		28.62
B	左外 LO	600 × 1600	680 × 1680	686 × 1686		34.51
		650 × 1650	730 × 1730	736 × 1736		35.88
		700 × 1750	780 × 1830	786 × 1836		37.78
		800 × 1750	880 × 1830	886 × 1836		39.71
C	右内 RI	600 × 1600	680 × 1680	686 × 1686		24.81
		650 × 1650	730 × 1730	736 × 1736		26
		700 × 1750	780 × 1830	786 × 1836		27.87
		800 × 1750	880 × 1830	886 × 1836		29.76
D	右外 RO	600 × 1600	680 × 1680	686 × 1686		26.72
		650 × 1650	730 × 1730	736 × 1736		28.41
		700 × 1750	780 × 1830	786 × 1836		29.8
		800 × 1750	880 × 1830	886 × 1836		31.73

钢质隔声门

STEEL SOUND PROOF DOOR

262WHL009-00

隔声值 47dB(A)
SOUND PROOF VALUE 47 dB(A)

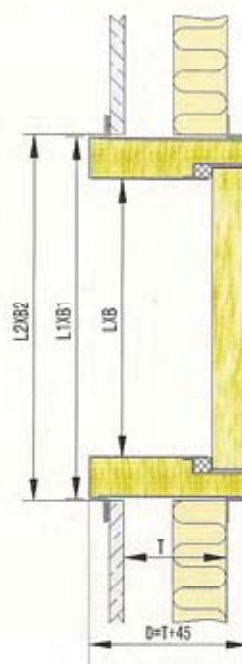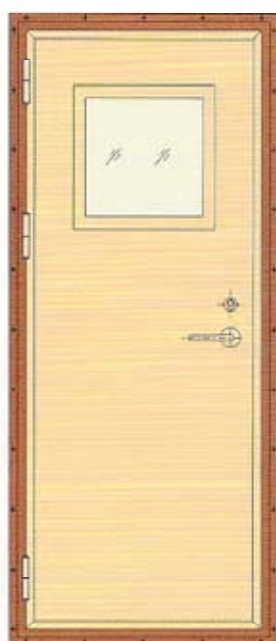

类 型	
名 称	符 号
一层壁不带窗 USED FOR SINGLE WALL AND WITHOUT LIGHT	A
一层壁带窗 USED FOR SINGLE WALL AND WITH LIGHT	AZ
二层壁不带窗 USED FOR DOUBLE WALL AND WITHOUT LIGHT	B
二层壁带窗 USED FOR DOUBLE WALL AND WITH LIGHT	BZ
三层壁不带窗 USED FOR THREE WALL AND WITHOUT LIGHT	C
三层壁带窗 USED FOR THREE WALL AND WITH LIGHT	CZ


通孔尺寸 DOORWAY SIZE L × B	门框尺寸 FRAME SIZE L1 × B1	围壁开孔尺寸 OPENING SIZE L2 × B2	重量 WEIGHT (Kg)
1650 × 600	1744 × 694	1750 × 700	96
1750 × 700	1844 × 794	1850 × 800	104
1650 × 800	1744 × 894	1750 × 900	115
1750 × 800	1844 × 894	1850 × 900	121

铝质隔声门

262WHL009A-00

ALUMINIUM SOUND PROOF DOOR

隔声值 37dB(A)
SOUND PROOF VALUE 37 dB(A)

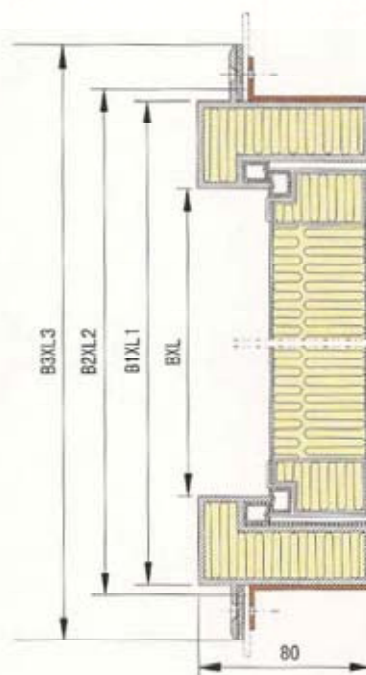

mm				
通孔尺寸 DOORWAY SIZE B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 OPENING SIZE B2 × L2	外形尺寸 SIZE OF DOOR B3 × L3	重量 WEIGHT kg
600 × 1650	680 × 1730	686 × 1736	730 × 1780	48.5
700 × 1750	780 × 1830	786 × 1836	830 × 1880	56.5

隔声防火门

SOUND & FIREPROOF DOOR

262WHL009F-00


此门隔声值 35dB(A) 防火 A30 级

THIS IS SOUNDPROOF 35dB (A) FIREPROOF A30 DOOR



适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

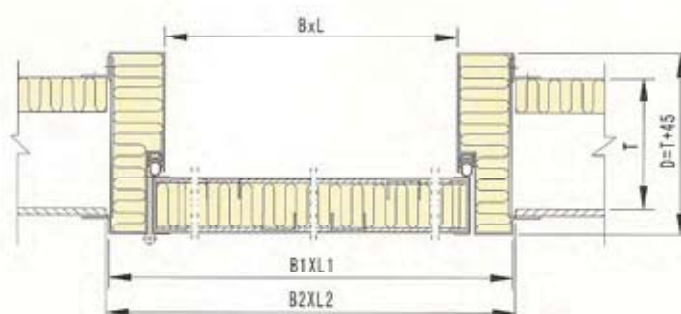

mm

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B. H. OPENING B2 × L2	重量 WEIGHT kg
600 × 1650	700 × 1750	705 × 1755	107
650 × 1650	750 × 1750	755 × 1755	112
700 × 1650	800 × 1750	805 × 1755	117
600 × 1700	700 × 1800	705 × 1805	110
650 × 1700	750 × 1800	755 × 1805	115
700 × 1700	800 × 1800	805 × 1805	120
700 × 1750	800 × 1850	805 × 1855	123

注：重量为 D=100mm 时计算结果。

THE WEIGHT IS CALCULATED AT D=100mm.

防火门遥控与配套件

WHB810-2006

REMOTE-CONTROL AND FITTINGS FOR FIRE-PROOF DOOR



一、提供防火门遥控电路接线原理图。


电制一般为 220V、380V、440V。
SUPPLY SCHEMATIC DIAGRAM OF FIRE-PROOF DOOR
FOR REMOTE-CONTROL LINE
VOLTAGE 220V、380V、440V

二、配套件 FITTINGS

- 1、释放开关
RELEASE BUTTON
- 2、近接开关
APPROACH BUTTON
- 3、控制箱
CONTROL BOX

三、要求 REQUIREMENT

- 1、订货方需提供遥控防火门在全船的位置图。
ORDERING ACTIVITY SUPPLY ARRANGEMENT PLAN FOR
REMOTE-CONTROL FIRE-PROOF DOOR
- 2、商定控制箱在驾控台上的开口尺寸。
CONFER AND DETERMINATION SIZE OF OPENING
FOR CONTROL BOX ON MANEUVERING CONSOLE

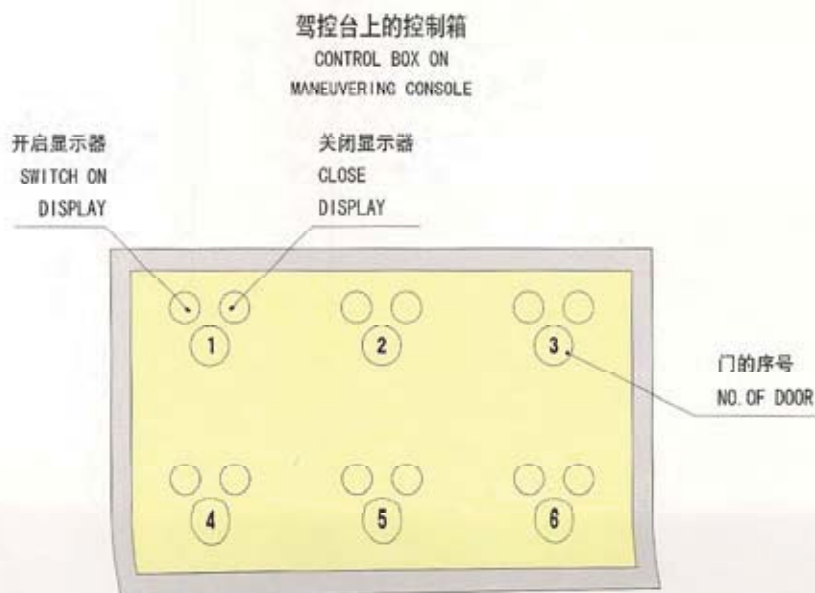

H120防火门


H120 FIREPROOF DOOR

262WHL006H-00



适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

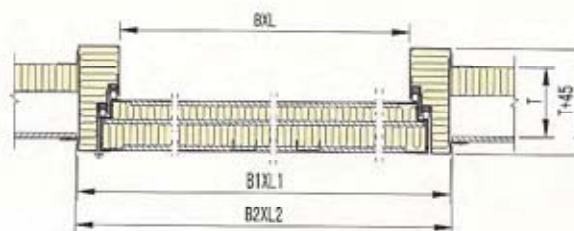

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B. H. OPENING B2 × L2	重量 WEIGHT kg
600 × 1650	720 × 1770	725 × 1775	135
650 × 1650	770 × 1770	775 × 1775	141
700 × 1650	820 × 1770	825 × 1775	148
600 × 1700	720 × 1820	725 × 1825	138
650 × 1700	770 × 1820	775 × 1825	145
700 × 1700	820 × 1820	825 × 1825	152
700 × 1750	820 × 1870	825 × 1875	156

mm

注：重量为 D=100mm 时计算结果。

THE WEIGHT IS CALCULATED AT D=100mm.

A60级带逃口通风栅防火门


262WHL005T-00

A60 CLASS FIRE-PROOF DOOR WITH ESCAPE & VENTILATION FENCE



适应舱壁 SUIT THE BULKHEAD

A	一道钢围壁	
B	一道钢围壁 一道装饰壁	
C	一道钢围壁 二道装饰壁	

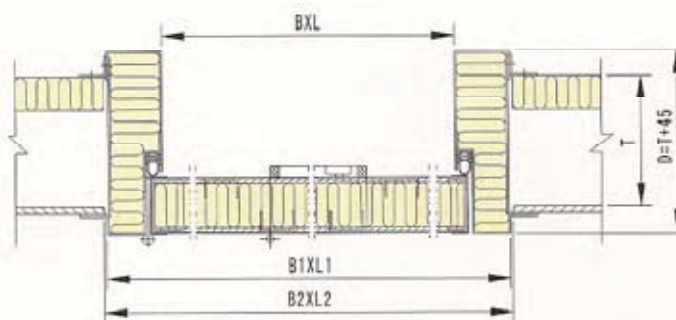

通孔尺寸 SIZE OF DOORWAY B × L	门框尺寸 FRAME SIZE B1 × L1	围壁开孔尺寸 SIZE OF B. H. OPENING B2 × L2	重量 WEIGHT kg
600 × 1650	700 × 1750	705 × 1755	115
650 × 1650	750 × 1750	755 × 1755	120
700 × 1650	800 × 1750	805 × 1755	125
600 × 1700	700 × 1800	705 × 1805	117
650 × 1700	750 × 1800	755 × 1805	123
700 × 1700	800 × 1800	805 × 1805	128
700 × 1750	800 × 1850	805 × 1855	132

mm


注：重量为 D=100mm 时计算结果。

THE WEIGHT IS CALCULATED AT D=100mm.

A60液压滑动水密门

A60 FIREPROOF HYDRAULIC SLIDING WATERTIGHT DOOR

262WHL073-00

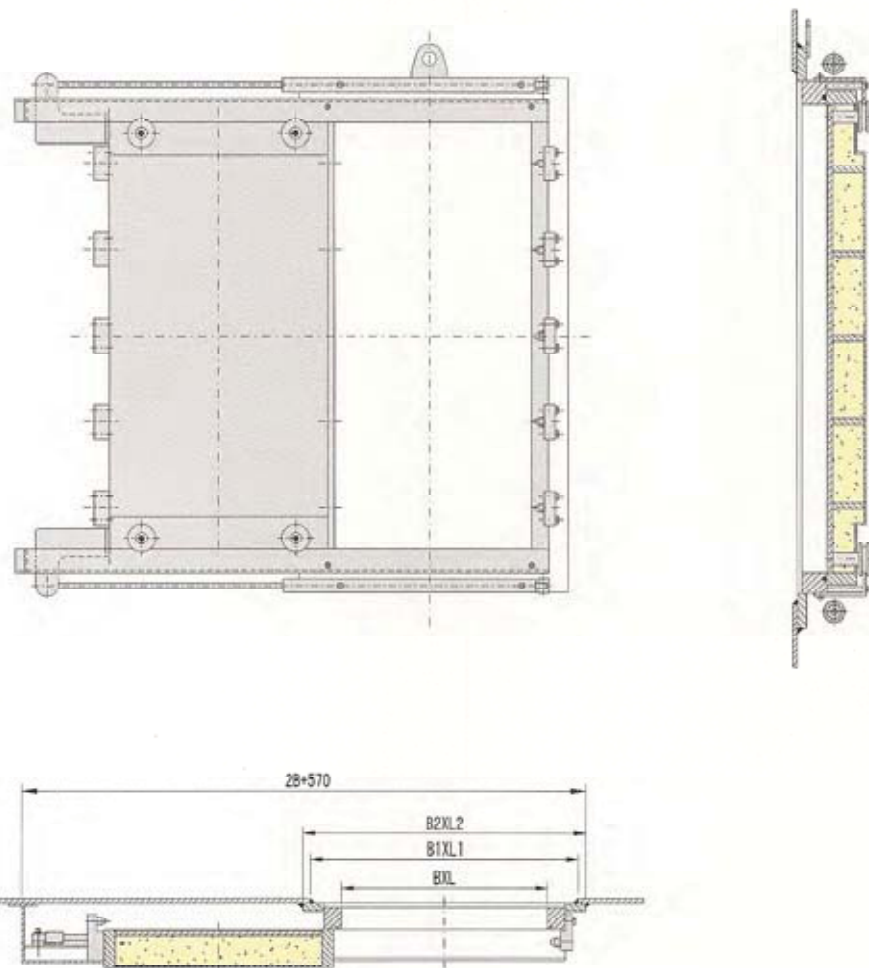

通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF OPENING B1 × L1	门框外形尺寸 SIZE OF FRAME B2 × L2	开 向 OPENING DIRECTION	重 量 WEIGHT Kg
500 × 1000	730 × 1230	800 × 1300	左开 L	612
600 × 1200	830 × 1430	900 × 1500		685
600 × 1400	830 × 1630	900 × 1700		802
700 × 1400	930 × 1630	1000 × 1700	右开 R	812
700 × 1600	930 × 1830	1000 × 1900		910
700 × 1800	930 × 2030	1000 × 2100		1006

液压滑动式水密门

262WHL094-00 (符合 CB/T3007-2000)


HYDRAULIC SLIDING WATERTIGHT DOOR

本产品用于船舶水线以下的水密隔壁处开口上的门，一般用于机舱与轴隧间。机舱与锅炉间、主机舱与副机舱间等，产品能够满足钢质海船入级与建造规范规定。

产品能够在机舱的两面进行手动操纵关闭和开启，而且设液压管路也能够能够在机舱两面进行手动液压操纵，并在上甲板设手动液压操纵手柄。

IT IS WATERTIGHT DOOR FOR BULKHEAD BELOW WATERLINE, WHICH IS USUALLY USED BETWEEN ENGINE ROOM AND SHAFT TUNNEL/BOILER ROOM/AUXILIARY MACHINERY ROOM, ETC. IT COMPLIES WITH CLASS RULES FOR SEA GOING SHIP.

THIS DOOR CAN BE MANUALLY OPERATED MECHANICALLY AND HYDRULICALLY AT BOTH SIDES OF ENGINE ROOM, HYDRAULIC OPERATING HANDLE ON UPPER DECK ALSO.

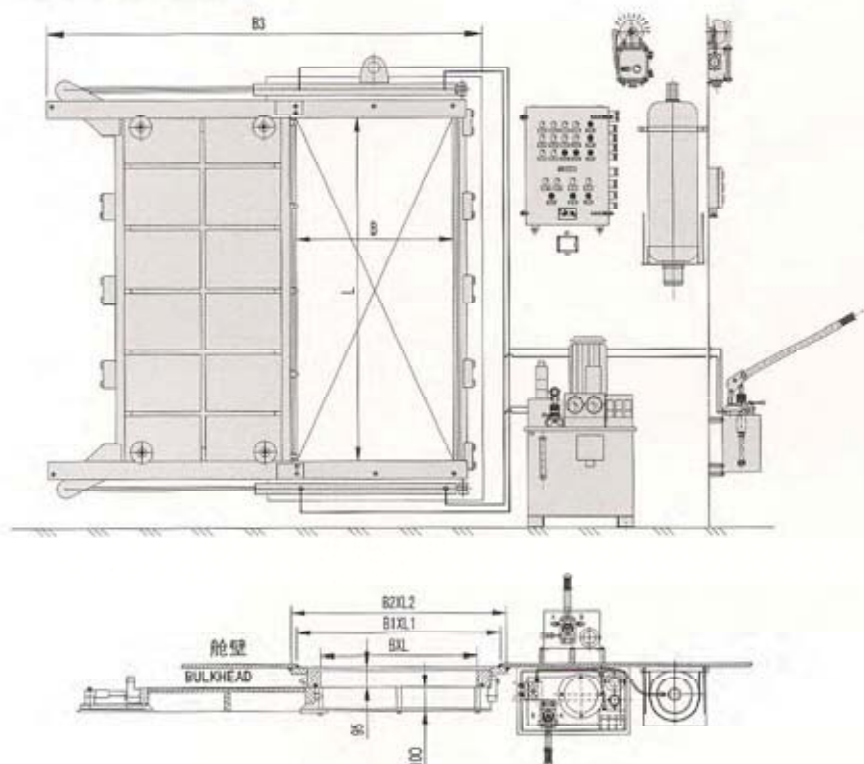

通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF OPENING B1 × L1	门框外形尺寸 SIZE OF FRAME B2 × L2	B3	开 向 OPENING DIRECTION	重 量 WEIGHT Kg
600 × 1000	800 × 1200	860 × 1360	1740	左开 L	600
600 × 1200	800 × 1400	860 × 1560	1740		670
600 × 1400	800 × 1600	860 × 1760	1740		785
700 × 1200	900 × 1400	960 × 1560	1940	右开 R	795
700 × 1400	900 × 1600	960 × 1760	1940		890
700 × 1500	900 × 1700	960 × 1860	1940		985



液压铰链式水密门

262WHL100-00

HYDRAULIC HINGED WATERTIGHT DOOR

此门能承受 0.1MPa 的压力。

THE DOOR COULD WITHSTAND 0.1MPa OF WATER PRESSURE.

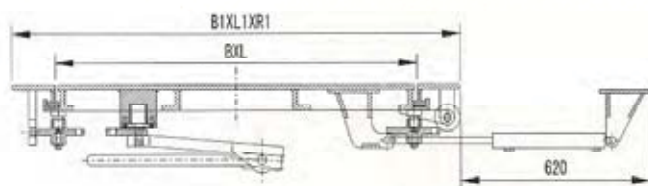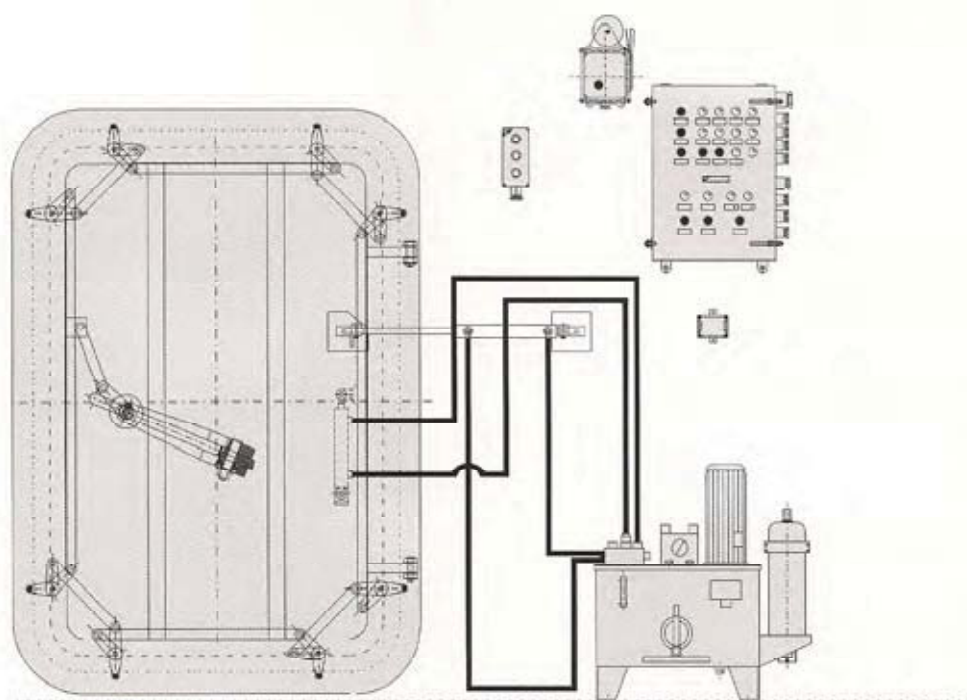

mm

通孔尺寸 SIZE OF DOORWAY B × L	围壁开孔尺寸 SIZE OF OPENING B1 × L1 × R1	门框外形尺寸 SIZE OF FRAME B1 × L1 × R1	开 向 OPENING DIRECTION	重 量 WEIGHT Kg
600 × 1000	840 × 1240 × R220	840 × 1240 × R220	左开 L	375
600 × 1100	840 × 1340 × R220	840 × 1340 × R220		391
600 × 1200	840 × 1440 × R220	840 × 1440 × R220		401
700 × 1200	940 × 1440 × R220	940 × 1440 × R220	右开 R	429
800 × 1200	1040 × 1440 × R220	1040 × 1440 × R220		450
900 × 1200	1140 × 1440 × R220	1140 × 1440 × R220		476


快开闭耐压水密门（单把手、圆盘式）

262WHL095-00

QUICK OPEN & CLOSE WATERTIGHT PRESSURE DOOR (SINGLE HANDLE, DISCAL)

此门最大能承受 0.08MPa 的压力。

THE DOOR COULD WITHSTAND 0.08MPa OF WATER PRESSURE.

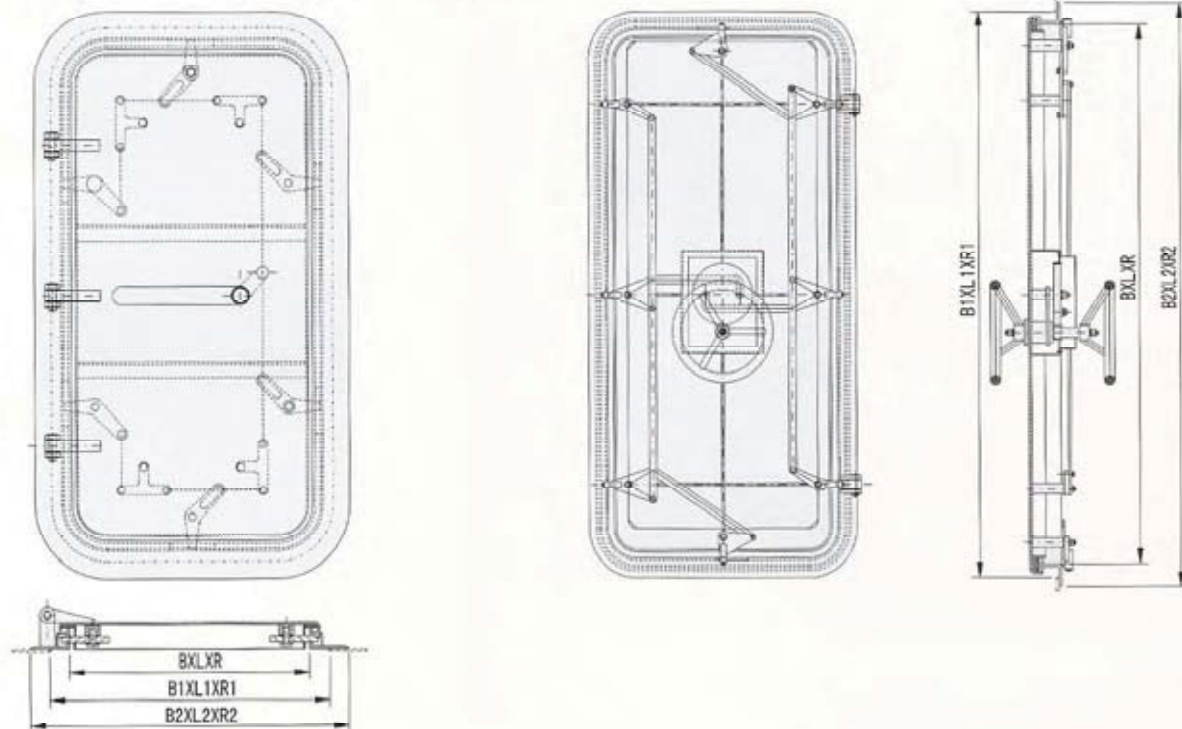

A 型（单把手）

TYPE A (SINGLE HANDLE)

B 型（圆盘式）

TYPE B (DISCAL)



mm

类型 TYPE	通孔尺寸 SIZE OF DOORWAY B × L × R	围壁开孔尺寸 SIZE OF B.H. OPENING B1 × L1 × R1	外形尺寸 SIZE OF OUTLINE B2 × L2 × R2	门板厚度 THICKNESS T	重量 WEIGHT kg	
					A	B
A	600 × 1500 × 100	700 × 1600 × 150	800 × 1700 × 200	8	166	178
	600 × 1600 × 100	700 × 1700 × 150	800 × 1800 × 200		172	190
	700 × 1500 × 100	800 × 1600 × 150	900 × 1700 × 200		187	199
	700 × 1600 × 100	800 × 1700 × 150	900 × 1800 × 200		199	211
	700 × 1700 × 100	800 × 1800 × 150	900 × 1900 × 200		210	222
B	800 × 1500 × 100	900 × 1600 × 150	1000 × 1700 × 200		208	220
	800 × 1600 × 100	900 × 1700 × 150	1000 × 1800 × 200		223	235
	800 × 1700 × 100	900 × 1800 × 150	1000 × 1900 × 200		249	261

A0电梯层门（旁开双折）

262WHL071-00

A0 LANDING DOOR FOR ELEVATOR (TWO PANELS SIDE)

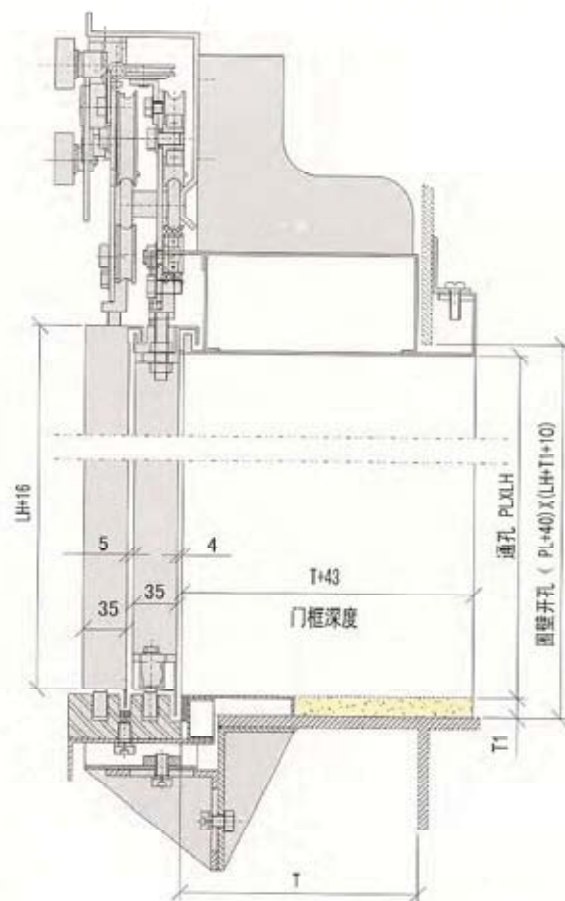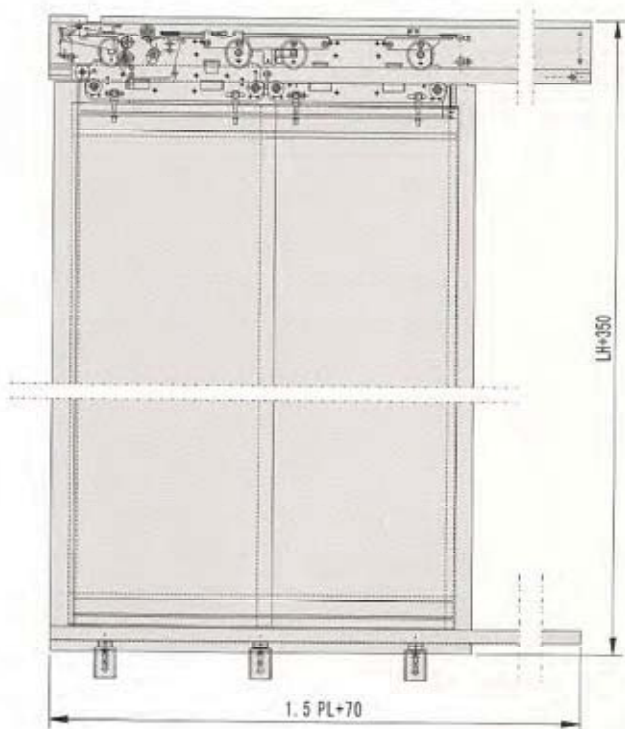

A0电梯旁开双折层门的规格表：



PL \ LH	1600	1700	1750	1800-2100	2150	2200	2250	2300
650	●	●	●	●	●	●	●	●
700	●	●	●	●	●	●	●	●
750	●	●	●	●	●	●	●	●
800	●	●	●	●	●	●	●	●
850-1350	●	●	●	●	●	●	●	●
1400	●	●	●	●	●	●	●	●
1450	●	●	●	●	●	●	●	●
1500	●	●	●	●	●	●	●	●
1550	●	●	●	●	●	●	●	●
1600	●	●	●	●	●	●	●	●
1700	●	●	●	●	●	●	●	●
1800	●	●	●	●	●	●	●	●

说明：● 易生产的门 ● 可生产的门

A0电梯层门（中分）

262WHL072-00

A0 LANDING DOOR FOR ELEVATOR (CENTRE)

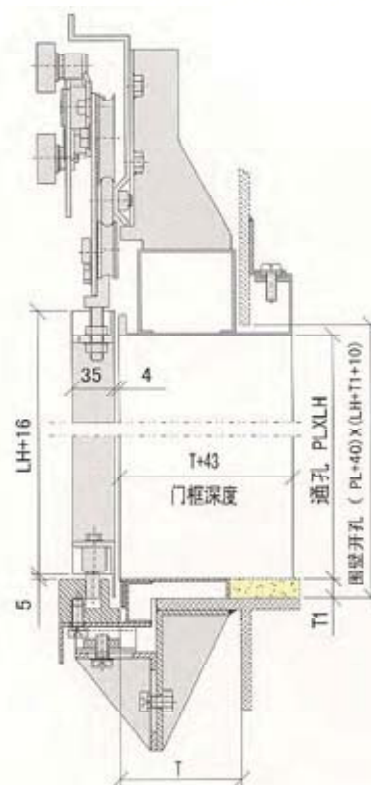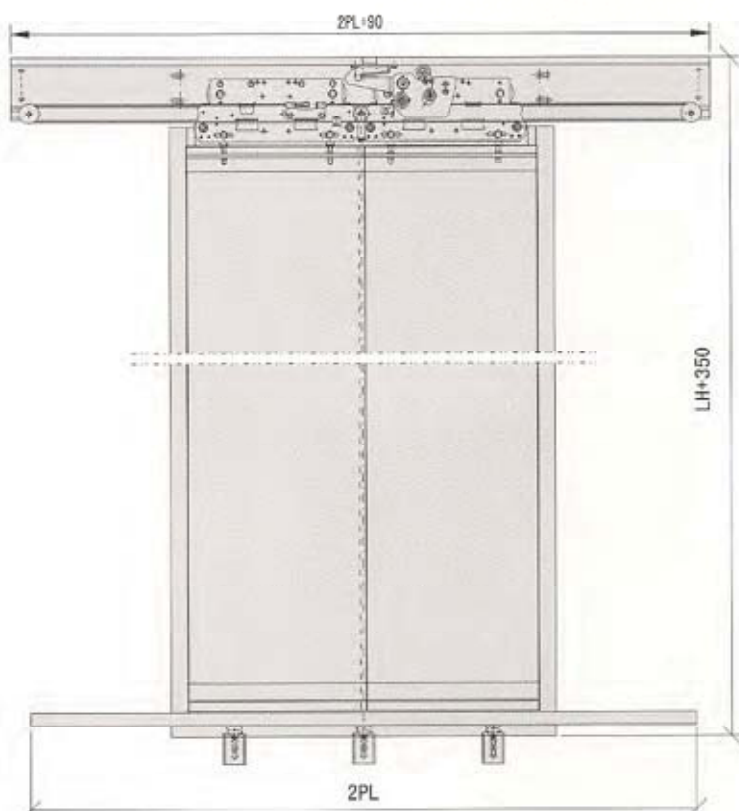

A0电梯中分层门的规格表：

PL \ LH	1600	1700	1750	1800-2100	2150	2200	2250	2300
650	●	●	●	●	●	●	●	●
700	●	●	●	●	●	●	●	●
750	●	●	●	●	●	●	●	●
800	●	●	●	●	●	●	●	●
850-1350	●	●	●	●	●	●	●	●
1400	●	●	●	●	●	●	●	●
1450	●	●	●	●	●	●	●	●
1500	●	●	●	●	●	●	●	●

说明： ● 易生产的门 ● 可生产的门

CLASSIFICATION SOCIETIES



Su seguro aliado

Your reliable ally

A large, stylized orange graphic that resembles a stylized letter 'A' or a winged figure, composed of several curved, overlapping shapes. It is positioned in the lower half of the page, behind the contact information.

De la Pinilla, 91
28023 Madrid – SPAIN
Tel. +34 617 481 349
Fax +34 913 079 421
asmain@asmain.com
www.asmain.com